

## ARCH Downlight Trimless Round 2700 K Flood White

REF. 91563002-200



### BASIC INFORMATION

#### FINISH

White

#### APPLICATION

Domestic, Office, Retail, Hotel, Contract

#### PACKAGING DIMENSIONS (MM)

16x224x171 mm

#### BODY MATERIAL

Die-cast aluminium

#### PACKAGING CONTENTS

1 Unit

#### ETIM CLASS

EC001744

## TECHNICAL INFORMATION

### FREQUENCY

50 - 60 Hz

### DIRECTIONAL

Yes

### LUMENS (LM)

700 lm

### IP RATING

IP20

### DRIVER INCLUDED

No

### NUMBER OF LUMINAIRES

1

### OPERATING TEMPERATURE RANGE (°C)

0 - 35 °C

### ELECTRICAL CLASS

II

### MACADAM STEPS

<3 Step MacAdam

### POWER SUPPLY (V~)

110/240 V~

### ENERGY EFFICIENCY

A+

### OPTICS

Flood 36°

### RAL

9016

### L70 (°C)

100000h at 25°C

### PHOTOBIOLOGICAL CLASSIFICATION

Class II

### COLOR TEMPERATURE (K)

2700 K

### L90 (°C)

30000h at 25°C

### POWER FACTOR (Φ)

> 0,9

### CRI

90

### COLOR TYPE

WW


### POWER (W)

9 W

### LIGHTING EFFICIENCY (LM/W)

111 lm/W

## PHOTOMETRY ASSETS – POLAR

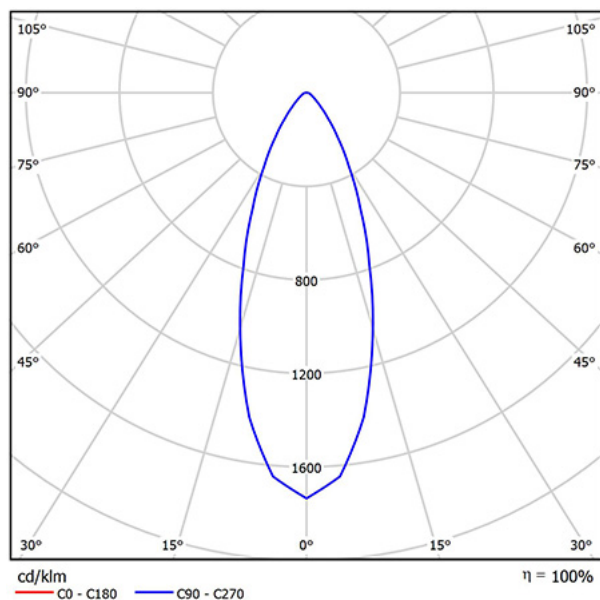

## INSTALLATION AND MAINTENANCE

### INSTALLATION ALTERNATIVES

Flush-mounted, Surface-mounted

### INSTALLATION TYPE

Trimless

## REGULATIONS

### EAC MARKED

Yes

### ECORRAE MARKED

No

### WARRANTY

5 years

## LOGISTICS INFORMATION

UNITARY EAN CODE

8436547035892

UNITARY PACKAGING WEIGHT  
UNIT

KGM

PACKAGING MEASUREMENT  
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8436547035892

PACKAGING VOLUME

4528125

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

116

PACKAGING GROSS WEIGHT

0.99

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

171

PACKAGING NET WEIGHT

0.719

UNITARY PACKAGING GROSS  
WEIGHT

0.9

PACKAGING LENGTH

224

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.719