


Flood detector for flush mounting with LED service status indicator white

REF. 75860-30

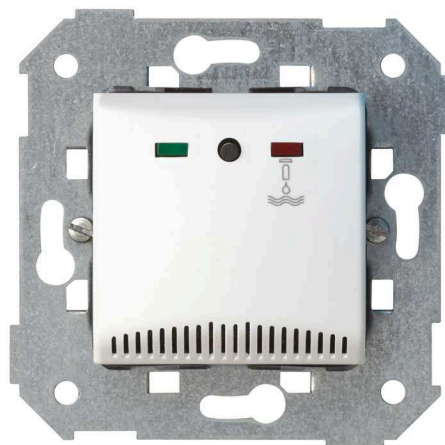

BASIC INFORMATION

DESCRIPTION

With the flood detector with probe and indicator light, with LED technology and acoustic function, Simon 75 provides a step forward to offer the maximum security against any type of emergency to detect possible water leaks. With a few finishes in white and designed for installation both recessed and surface-mounted, this detector with built-in indicator light light, it is compatible with a voltage of power of 230 Volts, frequency of 50-60 Hz and consumption of the 0.05 W signal function, it also supports a cable section of 1.5 to 2.5 mm and stripping from 11 mm For Simon 75, the security and protection are preemptive and, therefore, using metal materials with halogen-free thermoplastic isolated, to ensure your security is a possible fire. To complete the installation and enjoy the maximum of all the guarantees and features of the flood detector, it requires the power supply unit with reference number 75870-30.

FINISH

White

COMPATIBLE WITH SOLENOID VALVE

Yes

COMPATIBILITY

Frames Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations, Simon 28, Simon 31, Simon 44 Aqua, Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 and Simon 88

PACKAGING CONTENTS

Flood detector and instruction sheet

ETIM CLASS

EC001764

REMARKS

Requires power supply ref. 75870-30.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

ACOUSTIC FUNCTION

Yes

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

CONSUMPTION INDICATOR (MA)

0.05 W

NUMBER OF CONTACTS

6

NUMBER OF CONTROLLABLE CIRCUITS

1

ENTRY FOR DETECTORS

Yes

NUMBER OF POSSIBLE ELEMENTS

1 element

FREQUENCY

50 - 60 Hz

INDICATOR FUNCTION

Yes

IP RATING

IP20

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

OPERATING TEMPERATURE RANGE (°C)

0 - 40 °C

MODE OF OPERATION

External probe

POWER SUPPLY (V~)

230 V~

STORAGE TEMPERATURE RANGE (°C)

-20 - 75 °C

TYPE

Water

VERSION

Single

NUMBER OF WIRES

6

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

CLAW

Included

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION TYPE

Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

REGULATIONS

REGULATIONS

UNE-EN 61000-6-3:2007 + A1:2012

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053058442

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

558000

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.13

PRODUCT NET WEIGHT

0.13

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053058442

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

80

PACKAGING WIDTH

75

PACKAGING LENGTH

93

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

558000

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.13

PACKAGING NET WEIGHT

0.13

PACKAGING WEIGHT UNIT

KGM