

# ARCH downlight Flush-mounted Round 2700 K Spot 1-10 V White

REF. 91551001-200



## BASIC INFORMATION

### BODY MATERIAL

Die-cast aluminium

### PACKAGING CONTENTS

1 Unit

### ETIM CLASS

EC001744

### APPLICATION

Domestic, Office, Retail, Hotel, Contract

### PACKAGING DIMENSIONS (MM)

16x224x171 mm

## TECHNICAL INFORMATION

### FREQUENCY

50 - 60 Hz

### DIRECTIONAL

Yes

### LUMENS (LM)

800 lm

### IP RATING

IP43

### DRIVER INCLUDED

Yes

### NUMBER OF LUMINAIRES

1

### OPERATING TEMPERATURE RANGE (°C)

0 - 35 °C

### ELECTRICAL CLASS

II

### MACADAM STEPS

<3 Step MacAdam

### POWER SUPPLY (V~)

110/240 V~

### ENERGY EFFICIENCY

A+

### OPTICS

Spot 20°

### RAL

9016

### L70 (°C)

100000h at 25°C

### PHOTOBIOLOGICAL CLASSIFICATION

Class II

### COLOR TEMPERATURE (K)

2700 K

### L90 (°C)

30000h at 25°C

### POWER FACTOR (Φ)

> 0,9

### CONTROL

1-10 V, Push Dim

### COLOR TYPE

WW

### POWER (W)

9 W


### CRI

90

### LIGHTING EFFICIENCY (LM/W)

111 lm/W

## PHOTOMETRY ASSETS - POLAR

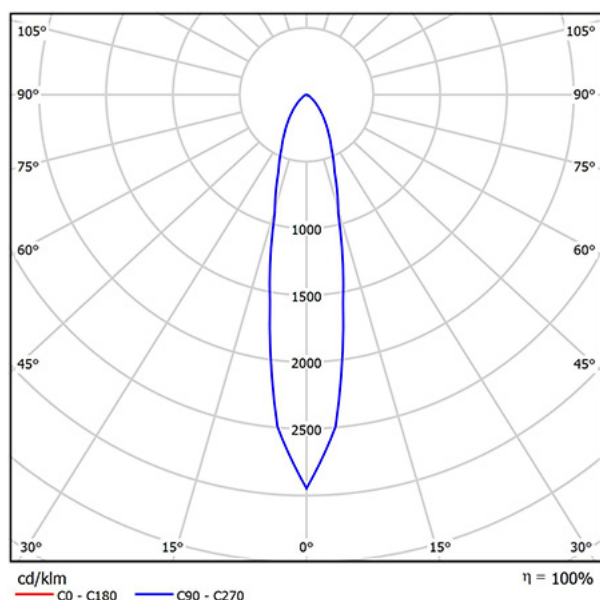

## INSTALLATION AND MAINTENANCE

### INSTALLATION ALTERNATIVES

Surface-mounted, Trimless

### INSTALLATION TYPE

Flush-mounted

## REGULATIONS

### EAC MARKED

Yes

### ECORRAE MARKED

Yes

### WARRANTY

5 years

## LOGISTICS INFORMATION

### UNITARY PACKAGING HEIGHT

0

### UNITARY PACKAGING WEIGHT UNIT

KGM

### PACKAGING MEASUREMENT UNIT

MMT

### UNITARY PACKAGING WIDTH

0

### PACKAGING EAN

8436547035731

### PACKAGING VOLUME

4443264

### UNITARY PACKAGING LENGTH

0

### UNITS CONTAINED PACKAGING

1

### PACKAGING VOLUME UNIT

MMQ

### UNITARY PACKAGING VOLUME

0

### PACKAGING HEIGHT

116

### PACKAGING GROSS WEIGHT

0.99

### UNITARY PACKAGING GROSS WEIGHT

0.72

### PACKAGING WIDTH

171

### PACKAGING NET WEIGHT

0.9

### PRODUCT NET WEIGHT

0.9

### PACKAGING LENGTH

224

### PACKAGING WEIGHT UNIT

KGM