


**Adjustable floor box kit for concrete floor 6 elements with
1 double socket, 1 double UPS socket and 2 plates with 1
RJ45 Cat.6A FTP connector grey Simon 500 Cima**

REF. 52007301-030

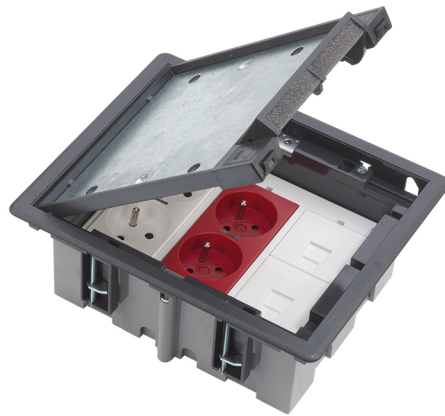

BASIC INFORMATION

DESCRIPTION

From the Simon 500 Cima series comes this with adjustable floor box kit for concrete floor and 6 elements with 1 double socket, 1 double UPS socket and 2 plates with 1 RJ45 Cat.6A FTP connector. In the format French-Belgian socket and snap-fit RJ45 Keystone I, II, ATT ® / Avaya ®. Finished in grey, with 1 double socket for standard current circuit. When installing mounted, keep in mind that it has a click terminal connection (1 click ®). To complete a successful installation of this product, it must be combined with a plastic tray (reference 52052103-035). Optionally, we recommend combining it with the flush-mount trim cover (reference 52053103-035) in cases where you do not install the same floor covering. This kit is specially designed and designed for assembly in concrete floor, although it is also suitable for installation in raised floor. Manufactured with different metal materials that have properties self-extinguishing and halogen-free. In case of fire, you will get the maximum protection.

FINISH

Grey

COMPATIBILITY

Simon 500 CIMA mechanisms

MATERIAL

Plastic

ETIM CLASS

EC000024

REMARKS

To complete the installation of the product, it must be combined with a plastic tray (ref.52052103-035) or with a metal tray (ref.52052203-033). Alternatively, it may be combined with flush-mount trim cover (ref.52053103-035) in cases where the same floor lining is not installed.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

FORMAT

French-Belgian

PLATE TYPE

Flat

PROTECTION AGAINST DIRECT ACCESS OF CONTACTS

Yes

IK CLASSIFICATION

08

RAL

7011

NUMBER OF CLAMP-HOLDER HOLES

8

INDICATOR FUNCTION

Yes

RECESS DIMENSION (MM)

170 x 210 mm

NUMBER OF CONNECTORS

2

CURRENT (A)

16 A

NUMBER OF UPS SOCKET OUTLETS

1

CONNECTOR TYPE

6A FTP

IP RATING

IP4X

VOLTAGE (V~)

250 V~

DUST SHUTTER

Yes

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

0

REMOVAL OF THE FRAME

Only with tool

REMOVAL OF THE SOCKET

Only with tool

NUMBER OF COVER OPENING POSITIONS

2

CAN BE INSTALLED IN TRAY

Plastic and metallic

TYPE OF TERMINAL

CONNECTION - FUNCTION 1

1 click connection (1 click®)

EXTINGUISHING (°C)

+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

INSTALLATION DIRECTION

Horizontal, Vertical

REMOVAL OF THE PLATE

Only with tool

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053112304

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

1.85

PRODUCT NET WEIGHT

1.85

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053112304

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

75

PACKAGING WIDTH

200

PACKAGING LENGTH

230

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3450000

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0

PACKAGING NET WEIGHT

1.85

PACKAGING WEIGHT UNIT

KGM