


## Simon iO key for electronic switch gloss black Simon 100

REF. 10002034-138

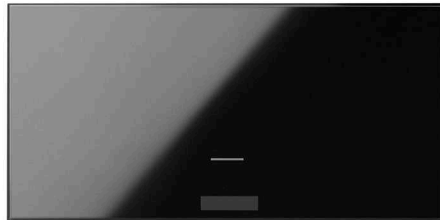

## BASIC INFORMATION

### DESCRIPTION

Simon iO switch for electronic switch with black finish and with an elegant touch of brightness, belonging to the Simon 100 series. It features the Simon iO system, based on the digitisation of spaces. Its installation is horizontal, it occupies only half an element, it is made of PMMA with thermoplastic base and it enjoys degree of IP protection of 20, the maximum possible degree that it can present in terms of resistance and durability.

It is a switch that is presented in an individual version and whose type of power is supplied from the mechanism, following a Z-wave protocol and with a number of LEDs of up to 7 units. For its correct maintenance, we must ensure that it is maintained in an environment between 0° C and 40° C during its operation, while in its storage we must ensure an environment between -25° C and 75° C. As regards its cleaning, we recommend the use of a soft cloth previously moistened in soapy water.

It has been developed in accordance with directive 2011/65 / UE RoHS + directive 2014/53 / UE RED + EN 50581: 2012 + EN 60669-2-5: 2016 + ETSI-300-220-2 v2.4.1.

### FINISH

Gloss black

### COMPATIBILITY

Simon 100 mechanisms

### ETIM CLASS

EC000011

### MATERIAL

Plastic

### PACKAGING CONTENTS

Rocker

## TECHNICAL INFORMATION

### AVAILABLE MARKET

CE

### CONNECTIVITY PROTOCOL

Z-wave

### OPERATING TEMPERATURE RANGE (°C)

0 - 40 °C

### NUMBER OF POSSIBLE ELEMENTS

Half element

### IP RATING

IP20

### STORAGE TEMPERATURE RANGE (°C)

-25 - 75 °C

### INDICATOR FUNCTION

No

### MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

### VERSION

Single

## INSTALLATION AND MAINTENANCE

### INSTALLATION DIRECTION

Horizontal

### INSTALLATION TYPE

Suitable for flush mounting

## REGULATIONS

### REGULATIONS

Directive 2011/65/UE RoHS + Directive 2014/53/UE RED + EN 50581:2012 + EN 60669-2-5:2016 + ETSI-300-220-2 v2.4.1

## LOGISTICS INFORMATION

### UNITARY EAN CODE

8421053146682

### UNITARY PACKAGING WEIGHT UNIT

KGM

### PACKAGING MEASUREMENT UNIT

MMT

### UNITARY PACKAGING HEIGHT

0

### PACKAGING EAN

8421053146682

### PACKAGING VOLUME

65122.2

### UNITARY PACKAGING WIDTH

0

### UNITS CONTAINED PACKAGING

1

### PACKAGING VOLUME UNIT

MMQ

### UNITARY PACKAGING LENGTH

0

### PACKAGING HEIGHT

25.3

### PACKAGING GROSS WEIGHT

0.35

### UNITARY PACKAGING VOLUME

0

### PACKAGING WIDTH

36

### PACKAGING NET WEIGHT

0.035

### UNITARY PACKAGING GROSS WEIGHT

0.035

### PACKAGING LENGTH

71.5

### PACKAGING WEIGHT UNIT

KGM

### PRODUCT NET WEIGHT

0.035