
Mechanism for creating 4 different lighting scenes

REF. **75326-39**

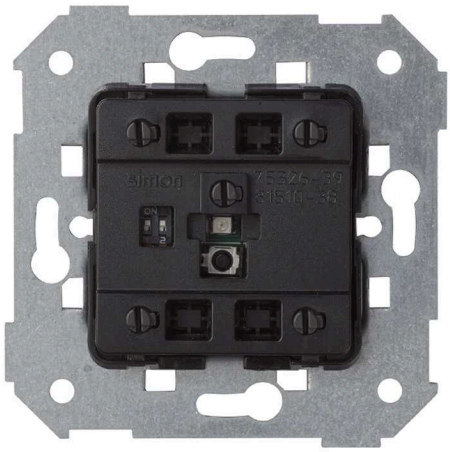

BASIC INFORMATION

DESCRIPTION

To each space a different lighting, thanks to the Simon 82 mechanism for creation of 4 different lighting scenarios, with switch of control of infrared. With screw terminal connection and suitable for installation, recessed or surface-mounted, it fits perfectly into any type of space, also, thanks to its simple design with minimalist lines and combination of colours and textures. Supports, in addition, a cable section of 1.5 to 2.5 mm with a stripped 10 mm It is compatible with a power of 230 Volts, 50 Hz and electromagnetic transformers 500 VA. Consists of a total of 10 wires and 4 circuits to ensure a perfect adjustment of light intensity to adapt to each room. Composed of electrical materials isolated with halogen-free thermoplastic, it protects the room in case of fire, supporting a temperature range of installation from 0 to 40 ° C and a maximum 70 ºC.

COMPATIBILITY

Simon 75, Simon 82 Detail, Simon 82 Nature and Simon 82 frames

COMPATIBLE WITH MECHANICAL PUSH BUTTON

No

COMPATIBLE WITH MECHANICAL SWITCH

No

PACKAGING CONTENTS

Scene creator and instruction sheet

REMARKS

Does not need programming.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

NUMBER OF CONTACTS
10

NUMBER OF CONTROLLABLE CIRCUITS
4

NUMBER OF POSSIBLE ELEMENTS
1 element

COMPATIBLE WITH FLUORESCENT LAMPS WITH 1-10V DIMMABLE ELECTRONIC BALLAST
No

COMPATIBLE WITH FLUORESCENT LAMPS (VA)
1200 VA Non-compensated

FREQUENCY
50 Hz

INDICATOR FUNCTION
No

IP RATING
IP20

COMPATIBLE WITH LOW CONSUMPTION (W)
No

TYPE OF MECHANISM
Push / IR

COMPATIBLE WITH MOTORS (VA)
No

OPERATING TEMPERATURE RANGE (°C)
0 - 40 °C

MODE OF OPERATION
4 lighting ambients

POWER SUPPLY (V~)
230 V~

VERSION
Single

NUMBER OF WIRES
10

INSTALLATION AND MAINTENANCE

BUS CONNECTION TYPE OF TERMINAL CONNECTION
Por inserción

CABLE STRIPPING NECESSARY (MM)
10

CLAW
Included

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal

INSTALLATION TYPE
Suitable for surface and flush mounting

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD|Dir. 2014/30/UE EMC|Dir. 2011/65/UE RoHS + post. mod.|EN 60669-2-1:2004|EN 60669-2-1:2004 A1:2009|EN 60669-2-1:2004 A12:2010|EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053071038

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
329232

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.1

PRODUCT NET WEIGHT
0.1

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053071038

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
57

PACKAGING WIDTH
76

PACKAGING LENGTH
76

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
0.329

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0.1

PACKAGING NET WEIGHT
0.1

PACKAGING WEIGHT UNIT
KGM