


**Two-pole switch 16AX 250V~ with indicator light function
and Faston/welding terminal connection system with plate
white Simon K45**

REF. KL04/9

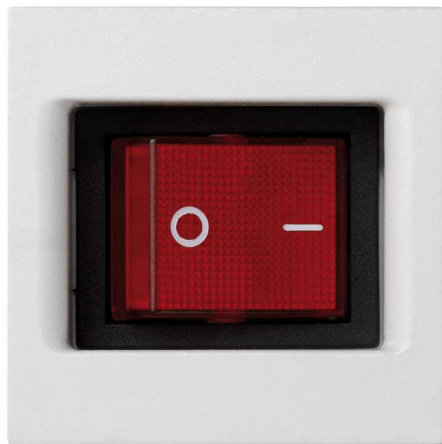

BASIC INFORMATION

DESCRIPTION

Double-pole switch with indicator light function and faston / welding clamping system with plate, in white colour and of the series Simon K45. It has a current of 16 AX and a voltage of 250V, in addition to presenting a operation of tilting type. This switch can be position, place in both of surface-mounted and flush mounted, in places with a temperature which is located between 5 and 40°C, approximately, although it can withstand, perfectly, extreme temperatures of -25 to 50°C. In addition, it includes the trim plate and I / O engraving and supports a section of wire up to 1.5 mm, with a stripping of 11 mm. Complies with the standards EN 60669-1: 1999 + A1: 2002 + A2: 2008 + EN 50581: 2012 and is manufactured with metal components with halogen-free insulation and thermoplastic trim, which is a material very simple cleaning since it will only need to use a soft and dry cloth, without resorting to never use cloths or abrasive cleaners that contain chlorine in its formula.

FINISH

White

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-030)

PACKAGING CONTENTS

Mechanism with plate, black and blue cabling, faston and instructions

ETIM CLASS

EC001590

REMARKS

The article includes the trim plate.

TECHNICAL INFORMATION

AVAILABLE MARKET CE	CURRENT (A) 16 AX	NOMINAL VOLTAGE (V~) 250 V~
CABLE SECTION ADMITTED (MM) Up to 1,5 mm	IP RATING IP20	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C
CONSUMPTION INDICATOR (MA) 0.5 W/h	MAINTENANCE Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.	RAL 9003
NUMBER OF POSSIBLE ELEMENTS 1 element	TYPE OF MECHANISM Tilting	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
INDICATOR FUNCTION Yes		

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 11	INSTALLATION DIRECTION Vertical according to the direction of the mechanisms	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Faston - Solder
INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-030)	INSTALLATION TYPE Suitable for surface and flush mounting	

REGULATIONS

REGULATIONS

EN 60669-1:1999+A1:2002+A2:2008 + EN 50581:2012

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
1472064

UNITARY PACKAGING VOLUME
UNIT
MMQ

UNITARY PACKAGING GROSS
WEIGHT
0.037

PRODUCT NET WEIGHT
0.037

UNITARY PACKAGING WEIGHT
UNIT
KGM

PACKAGING EAN
8426436034525

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
88

PACKAGING WIDTH
123

PACKAGING LENGTH
136

PACKAGING MEASUREMENT
UNIT
MMT

PACKAGING VOLUME
1472064

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.37

PACKAGING NET WEIGHT
0.37

PACKAGING WEIGHT UNIT
KGM