


Voice and data flat plate for 1 element without dust cover for 1 Panduit® RJ45 connector white Simon K45

REF. K069/9

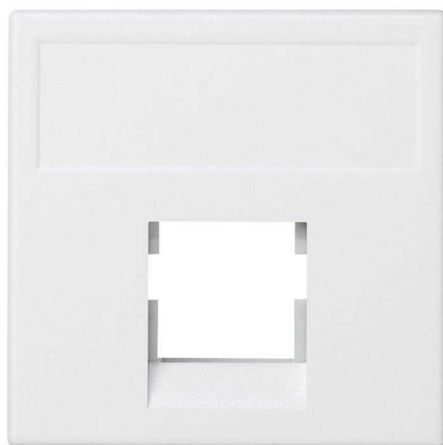

BASIC INFORMATION

DESCRIPTION

In its permanent search for solutions according to the notable and rapid technological advances, Simon designs its ranges and collections of connections to be perfectly compatible with the majority of the best brands sold on the market. The voice and data plates of the K45 range are specially designed for assembly in housings of the SIMON CONNECT K45 range, using direct snap-fit. They can also be installed in the CIMA Range using the plates adaptable to the system being installed. The Simon Connect system offers a complete solution with a wide range of angled and flat plates with connectors of proven quality. This plate is, among others, perfectly compatible with Panduit® connectors, for which it is specially designed. This is a flat voice and data plate without dust cover with 1 element for 1 Panduit® RJ45 connector. White finish from the Simon K45 range. Compatible with Panduit® RJ45 Connectors. Single position. When combining the voice and data plate in vertical housings (mini columns, columns, Teleblock, mechanism holder trunking) you must use the 90° positioner (ref. K66) to guide the plate into a vertical position. Dimensions 45 x 45 mm and depth. 8.5 mm Halogen-free thermoplastic that ensures no flame propagation in case of fire and low toxicity in case of smoke. Fully complies with the regulations on extreme temperatures. UNE-EN 60670-1: 2006 (-5 to +60 °C + 60 °C). Clean with a soft, dry cloth, do not use abrasive products or cleaners.

FINISH

White

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-030)

PACKAGING CONTENTS

Flat voice and data plate without dust cover

ETIM CLASS

EC000018

REMARKS

When combining the voice and data plate in vertical housings (mini columns, columns, Teleblock, channels, mechanism holders, etc.) you must use the 90° positioner (ref. K66) to guide the plate into a vertical position.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

DUST SHUTTER

No

NUMBER OF MODULES

Half

AVAILABLE IN

Plate for 1 and 2 RJ45 connectors

FORMAT

RJ45

PLATE TYPE

Flat

COMPATIBLE WITH CONNECTORS

Panduit® Mini-Com Series.

IP RATING

IP20

RAL

9003

RJ45 CONNECTORS

Not included in voice and data plate

KIT AVAILABILITY

No

RJ45 ADAPTOR MODULE

Included in voice and data plate

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60° C

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

SNAP-FIT RJ45 PLATES

Panduit® RJ45 connectors

SNAP-FIT TYPE

Panduit® RJ45 connectors

DUST PROTECTION

No

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60° C

VERSION

Single

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-030)

INSTALLATION DIRECTION

Vertical according to the direction of the mechanisms

INSTALLATION TYPE

Suitable for surface and flush mounting

REMOVAL OF THE PLATE

Only with tool

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.01

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING VOLUME

911400

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8426436025073

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

45570

UNITS CONTAINED PACKAGING

20

PACKAGING GROSS WEIGHT

0.2

UNITARY PACKAGING VOLUME UNIT

MMQ

PACKAGING HEIGHT

70

PACKAGING NET WEIGHT

0.2

UNITARY PACKAGING GROSS WEIGHT

0.01

PACKAGING WIDTH

93

PACKAGING WEIGHT UNIT

KGM

PACKAGING LENGTH

140