
Voice and data flat plate without dust cover and 1 element with 1 RJ45 connector category 5e UTP white Simon K45

REF. **K095U/9**

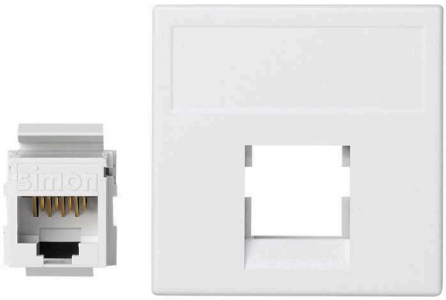

BASIC INFORMATION

DESCRIPTION

Plate for connection voice and data of an element for RJ45 category 5e UTP, belonging to the collection Simon K45. It is manufactured with metal components with thermoplastic insulation and halogen-free, supports 22-26 AWG of wire and has a white colour finish. The series Simon K45 is based on one of the best options for work the workplace solutions and the entrances to it in the workplace or professional environments. Thanks to the wide range of plates, boxes, connection blocks, mini-towers, sockets or its protections, make it one of the most complete series related to the connections, whether voice, data or multimedia connections. In addition, and did you know that the Simon K45 products are manufactured with materials that allow the no flame propagation in case of fire management or low toxicity in case of smoke? So, thanks to Simon, you will always have the maximum security inside and outside of your home.

FINISH

White

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-030)

PACKAGING CONTENTS

Flat voice and data plate without dust cover RJ45 category 5e UTP connector and installation manual

ETIM CLASS

EC000018

REMARKS

When combining the voice and data plate in vertical housings (mini columns, columns, Teleblock, channels, mechanism holders, etc.) you must use the 90º positioner (ref. K66) to guide the plate into a vertical position.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
22-26 AWG wiring

RJ45 CONNECTION
With insertion tool

CONNECTOR CHARACTERISTICS
Category 5e UTP

RJ45 CONNECTORS
Included in voice and data plate

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60° C

DUST PROTECTION
No

FORMAT
RJ45

IP RATING
IP20

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60° C

NUMBER OF MODULES
Half

PLATE TYPE
Flat

RAL
9003

RJ45 ADAPTOR MODULE
Included in voice and data plate

SNAP-FIT RJ45 PLATES
Keystone I, II, ATT®/Avaya®

SNAP-FIT TYPE
Keystone I, II, ATT®/Avaya®

VERSION
Single

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-030)

INSTALLATION DIRECTION
Vertical according to the direction of the mechanisms

INSTALLATION TYPE
Suitable for surface and flush mounting

REMOVAL OF THE PLATE
Only with tool

REGULATIONS

REGULATIONS
Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
147206

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.023

PRODUCT NET WEIGHT
0.023

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8426436031975

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
88

PACKAGING WIDTH
123

PACKAGING LENGTH
136

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
1472064

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.23

PACKAGING NET WEIGHT
0.23

PACKAGING WEIGHT UNIT
KGM