Push button bell unipolar 16A 127V with screw terminal connection white Simon 25 Plus

REF. **25150-30**

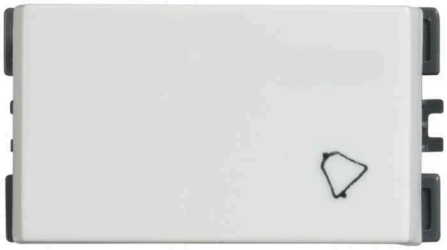

BASIC INFORMATION

FINISH

White

TECHNICAL INFORMATION

CABLE SECTION ADMITTED (MM)

3,3 mm

CURRENT (A)

16 A

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

VOLTAGE (V~)

127/220 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
11

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Fast

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
22.2

UNITARY PACKAGING WIDTH
40.5

UNITARY PACKAGING LENGTH
41.2

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0.037

UNITARY PACKAGING VOLUME UNIT
DMQ

UNITARY PACKAGING GROSS WEIGHT
23

PRODUCT NET WEIGHT
23

UNITARY PACKAGING WEIGHT UNIT
GRM

PACKAGING EAN
7506020300272

UNITS CONTAINED PACKAGING
20

PACKAGING HEIGHT
45

PACKAGING WIDTH
85

PACKAGING LENGTH
224

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
0.857

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0.46

PACKAGING NET WEIGHT
460

PACKAGING WEIGHT UNIT
KGM

VISTA FRONTAL E ISOMÉTRICA DEL PRODUCTO

DIAGRAMA DE MONTAJE

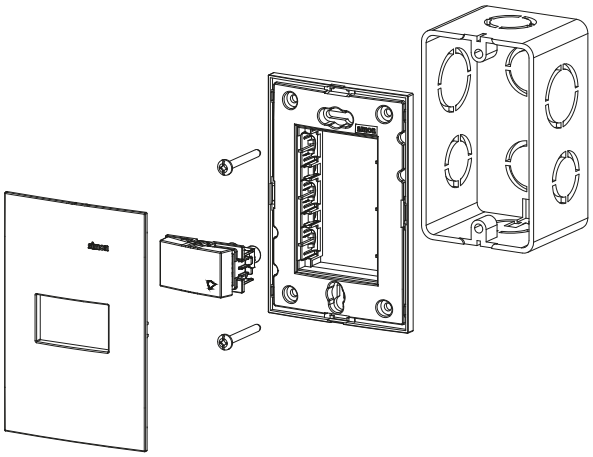

*Placa y chasis NO incluidos
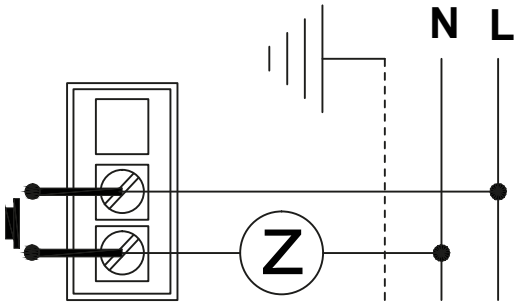
DIAGRAMA DE CONEXIÓN