Plastic tray for adjustable floor box 4 elements for concrete floor installation Simon 500 Cima

REF. **52052102-035**



BASIC INFORMATION

DESCRIPTION

For a complete integration into the space, the plastic tray for four elements for adjustable floor box Simon 500 Cima, in a discreet grey tone, it is designed for flush installation in concrete floor. For a complete installation of the product, it must be combined with a for concrete floor box in Grey. The innovation of its materials of manufacture, protecting the flame spread and smoke poison in case of fire, to be made of halogen-free thermoplastic. The Simon 500 Cima plastic tray, it can withstand high temperatures that arrive to reach the most of 90 ºC. With a size of 220 x 172 x 80 mm, to its finishes in discreet grrey tone and simplicity made innovation, are linked to the elegance of a product that is findings with the concrete floor, guaranteeing the security of your room, maximizing functionality and minimizing the space. The collection Simon 500 Cima in its range of trays for adjustable floor box is perfectly to your office, office or room.

FINISH

Grey

MATERIAL

Plastic

PACKAGING CONTENTS

Tray and protective cover with installation manual

ETIM CLASS

EC000114

REMARKS

To complete the installation of the product, it must be combined with a concrete floor box for 4 elements in a grey (ref.52050002-035) or graphite finish (ref.52050002-038).

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

AVAILABLE IN

2, 4, 6, 8 and 12 elements

DIELECTRIC STRENGTH

No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (ºC)

+90 ºC

HEAT RESISTANCE (ºC)

+125ºC (according rule IEC 60695-10-2)

IK CLASSIFICATION

08

INSULATION RESISTANCE (V-MΩ)

>5 MOhms at 500V

IP RATING

IP4X

KIT AVAILABILITY

No

TEMPERATURE RANGE DURING INSTALLATION (ºC)

-5 to 60 ºC

NUMBER OF MODULES

4 modules

RECESS DIMENSION (MM)

220 x 172,2 mm

NUMBER OF SIDE ENTRANCES

4

VERSION

4 elements

INSTALLATION AND MAINTENANCE

NUMBER OF CHANNEL ENTRIES

2

EXTINGUISHING (ºC)

+850 ºC / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING

Using screws

INSTALLATION DIRECTION

Horizontal, Vertical

INSTALLATION TYPE

Specially designed for installation in concrete floors

SCREWS REQUIRED FOR SLAB FIXING

Minimum 2 (1 per side, diagonally). It is recommended to fix the bowl with 4 screws for complete fixation.

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053101728

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.74

PRODUCT NET WEIGHT
0.74

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053101728

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
75

PACKAGING WIDTH
200

PACKAGING LENGTH
230

PACKAGING MEASUREMENT UNIT
MMT

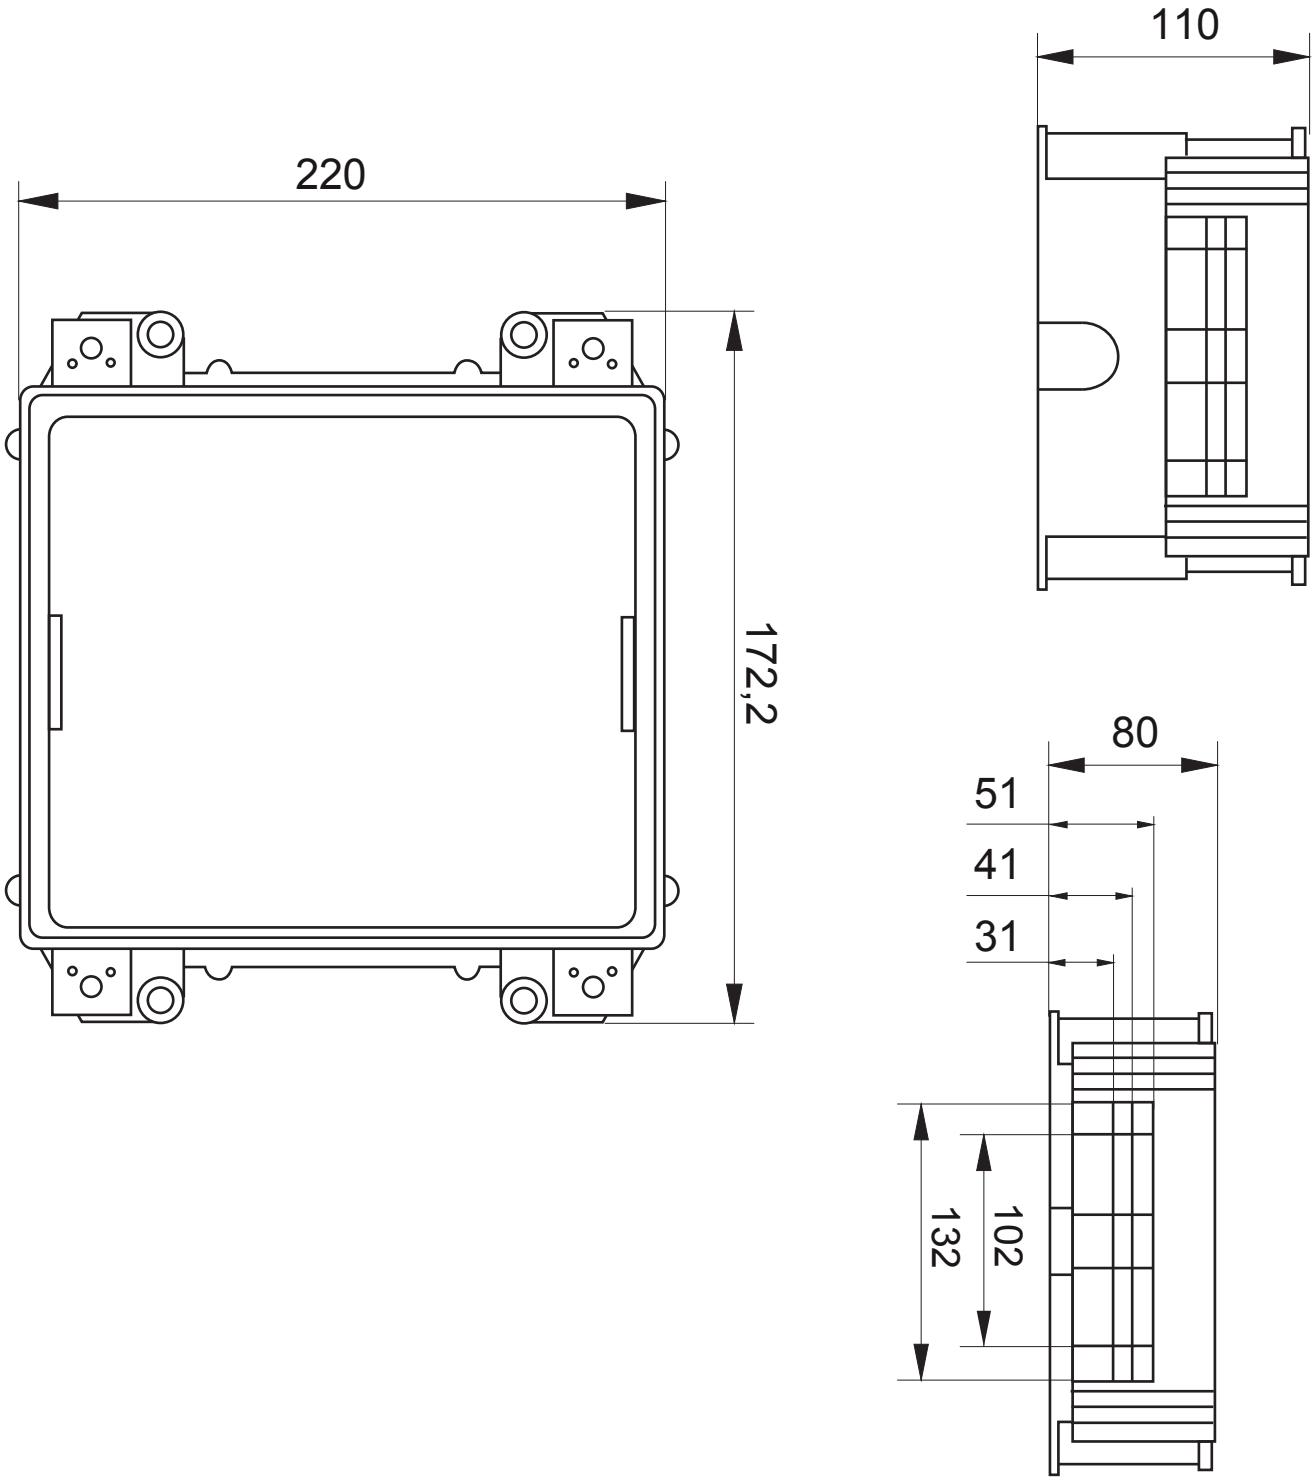
PACKAGING VOLUME
3.45

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.74

PACKAGING WEIGHT UNIT
KGM


110
220
172,2
80
51
41
31
132
102