


**Front kit for 2 elements with 1 German socket outlet, 1 single R/TV+SAT socket with 1 RJ45 6 UTP connector gloss black Simon 100**

REF. 10020208-138

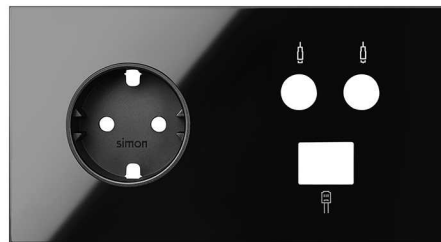

## BASIC INFORMATION

### DESCRIPTION

Front kit that occupies 2 elements with 1 Schuko plug base, 1 single R-TV + SAT socket with 1 RJ45 6 UTP connector. This elegant device is black, has a glossy finish and is included in the Simon series 100. Its type of connection is by click and the USB screw zone in terms of the type of activation is by insertion.

With this front kit you will enjoy several features in the same product: data, image and audio. It has RJ45 6 UT output for internet connection, TV output, R-TV + SAT and a plug to power any device.

It is a type of device that can be placed both vertically and horizontally. It works with a voltage of 250 V ~ and for its correct operation requires a temperature range of 5 to 40 ° C for its operation and a temperature range -25 to 50 ° C for storage.

It complies with regulations 2014/35 / UE LVD + directive 2014/30 / UE EMC + directive 2011/65 / UE RoHS + EN 50083-2: 2012 \* 4 + EN 50581: 2012 + IEC 60603-7-4: 2010 \* 5 + IEC 60884-1 Ed. 3.2 \* 1.

### FINISH

Gloss black

### COMPATIBILITY

Kit mechanisms Simon 100

### ETIM CLASS

EC000007

## TECHNICAL INFORMATION

### AVAILABLE MARKET

CE

### NUMBER OF POSSIBLE ELEMENTS

2 elements

### INDICATOR FUNCTION

No

### MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

### MONOBLOCK

Yes

### OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

### STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

### VERSION

2 elements

### VOLTAGE (V~)

250 V~

## INSTALLATION AND MAINTENANCE

### INSTALLATION DIRECTION

Vertical and horizontal

### INSTALLATION TYPE

Suitable for flush mounting

### TYPE OF TERMINAL

#### CONNECTION - FUNCTION 2

R-TV+SAT: Screw

## REGULATIONS

### REGULATIONS

Directive 2014/35/UE LVD + Directive 2014/30/UE EMC + Directive 2011/65/UE RoHS + EN 50083-2:2012\*4 + EN 50581:2012 + IEC 60603-7-4:2010\*5 + IEC 60884-1 Ed. 3.2\*1

## LOGISTICS INFORMATION

### UNITARY EAN CODE

8421053147740

### UNITARY PACKAGING WEIGHT UNIT

KGM

### PACKAGING MEASUREMENT UNIT

MMT

### UNITARY PACKAGING HEIGHT

0

### PACKAGING EAN

8421053147740

### PACKAGING VOLUME

329406

### UNITARY PACKAGING WIDTH

0

### UNITS CONTAINED PACKAGING

1

### PACKAGING VOLUME UNIT

MMQ

### UNITARY PACKAGING LENGTH

0

### PACKAGING HEIGHT

25.3

### PACKAGING GROSS WEIGHT

0.098

### UNITARY PACKAGING VOLUME

0

### PACKAGING WIDTH

155

### PACKAGING NET WEIGHT

0.098

### UNITARY PACKAGING GROSS WEIGHT

0.098

### PACKAGING LENGTH

84

### PACKAGING WEIGHT UNIT

KGM

### PRODUCT NET WEIGHT

0.098