

Single-pole switch 10AX 250V~ with built-in pilot light and fast terminal connection system white Simon 27 Play

REF. 27102-65



BASIC INFORMATION

DESCRIPTION

The is single-pole switch with pilot light and fast-terminal connection system in white finish of the Simon 27 Play range, with an intensity of 10 AX and a voltage of 250 V~, it has a tilting operation, can be combined with the reference 2700802-037 in case of replacement of indicator light. In the individual version, the number of elements is one and 2 module comes with a signaling function which consumes 0.55 mA and without engraving on the rocker. For its installation, it will be enough to apply pressure or place on the surface. The wire section admitted is from 1.5 to 2.5 mm and has 11 mm of bare wire. The material is socket of metal components with halogen-free thermoplastic insulation and thermoset trim, being able to oscillate between 5 and 40°, and can support up to a maximum of between -25 and 50° C. The dimensions of the switch are 45x45 mm, although it is available in other sizes and colors to keep the piece clean, use a soft and dry cloth, under no circumstances be poured abrasive cloths or cleaners with high chlorine content. Complies with the regulation EN 60669-1: 1999 + A1: 2002 + A2: 2008 + EN 50581: 2019

FINISH

White

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Mechanism with rocker

ETIM CLASS

EC001590

REMARKS

Can be combined with article 2700802-037 if replacing the light indicator.

TECHNICAL INFORMATION

AVAILABLE MARKET CE	CURRENT (A) 10 AX	NOMINAL VOLTAGE (V~) 250 V~
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	IP RATING IP20	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C
CONSUMPTION INDICATOR (MA) 0.55 mA	MAINTENANCE Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
NUMBER OF POSSIBLE ELEMENTS 1 element	TYPE OF MECHANISM Pivoting	VERSION Single
INDICATOR FUNCTION Yes		

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 11	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal, American and Centralisations	INSTALLATION TYPE Suitable for surface and flush mounting
CLAW Simon 27	INSTALLATION DIRECTION Horizontal, Vertical	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053035931

PRODUCT NET WEIGHT

0.034

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING VOLUME

1229865

UNITARY PACKAGING WIDTH

0

PACKAGING EAN

8421053035931

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

UNITS CONTAINED PACKAGING

10

PACKAGING GROSS WEIGHT

0.335

UNITARY PACKAGING VOLUME

1229865

PACKAGING HEIGHT

53

PACKAGING NET WEIGHT

0.34

UNITARY PACKAGING VOLUME UNIT

MMQ

PACKAGING WIDTH

105

PACKAGING WEIGHT UNIT

KGM

UNITARY PACKAGING GROSS WEIGHT


0.034

PACKAGING LENGTH


221

MECANISMOS SIMON 27, 28 Y 44


Mecanismos básicos / Basic switches




Interrupor unipolar / Single-pole switch
XX00101-XX




Pulsador / Push button switch
XX00150-XX



Interrupor bipolar / Double pole switch
XX00133-XX




Conmutador / 2-way switch
XX00201-XX

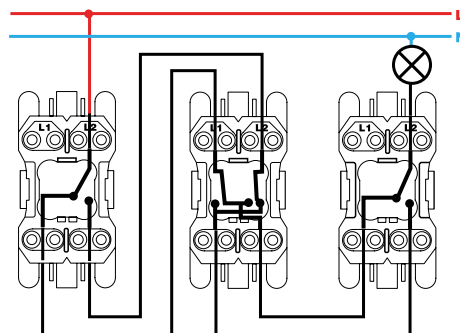


Conmutador cruce / Intermediate switch
XX00251-XX


Mecanismos con piloto / Pilot switches




Interrupor unipolar / Single-pole switch
XX00102-XX




Interrupor bipolar / Double pole switch
XX00134-XX

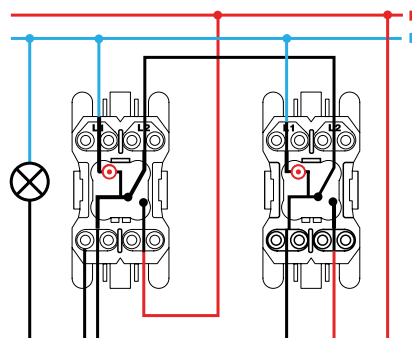


Conmutador / 2-way switch
XX00202-XX




Interrupor unipolar / Single-pole switch
XX00104-XX



Pulsador / Push button switch
XX00160-XX



Conmutador / 2-way switch
XX2700204-XX

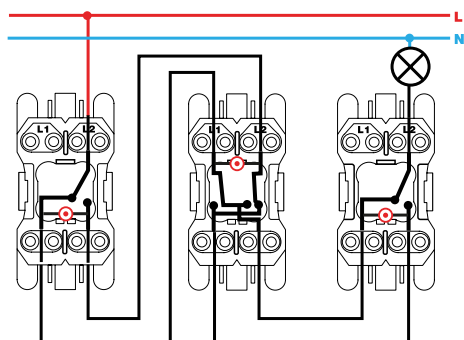

Conmutador cruce / Intermediate switch
XX2700254-XX