


Voice and data flat plate without dust cover 1 element for 1 3M® RJ45 connector black Simon K45

REF. K045/14

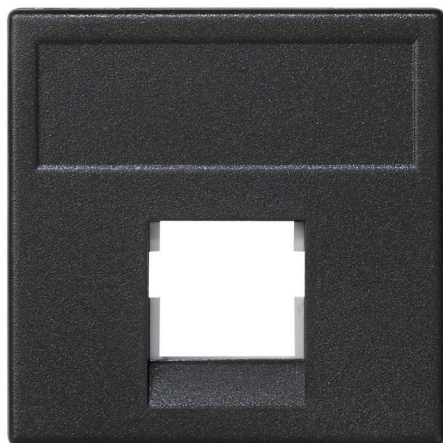

BASIC INFORMATION

DESCRIPTION

Simon's range of connectors and voice and data plates (K45) supports any connector on the market. They come in plates with or without dust cover, their automatic closure help keep the transmission parameters unchangeable. It also has an area for labelling area or for sticking the identification label. The plates can be flat or angled, although in this case installation is facilitated by placing positioners necessary to avoid inconvenience and to improve the safety of the system and people. Are also compatible with copper connectors, which ensures ease and comfort in the installation and improves the solving of any problem with connections. This is a flat voice and data plate without dust cover with 1 individual element for 1 3M® RJ45 connector. black finish. Line Simon K45 3M ® RJ45 connectors. If combining the voice and data plate in vertical housing (mini columns, columns, Teleblock, mechanism holder trunking) you must use the 90° positioner (ref. K66) to guide the plate into a vertical position. Dimensions 45 x 45 mm x 8.5 mm halogen-free thermoplastic that guarantees no flame propagation in case of fire and low toxicity in case of smoke. Complies with regulations on resistance to high temperatures: UNE-EN 60670-1:2006 (-5 to +60 °C + 60 °C). Suitable for surface mounting and flush mounting. It is recommended to clean it with a soft, dry cloth and do not use abrasive cloths and / or abrasive cleaners containing chlorine.

FINISH

Black

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-038)

PACKAGING CONTENTS

Flat voice and data plate without dust cover

ETIM CLASS

EC000018

REMARKS

When combining the voice and data plate in vertical housings (mini columns, columns, Teleblock, channels, mechanism holders, etc.) you must use the 90° positioner (ref. K66) to guide the plate into a vertical position.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

COMPATIBLE WITH CONNECTORS

Volition OCK®, RJ45, K5e and K6 from 3M®.

RJ45 CONNECTORS

Not included in voice and data plate

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60° C

DUST PROTECTION

No

FORMAT

RJ45

IP RATING

IP20

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60° C

NUMBER OF MODULES

Half

PLATE TYPE

Flat

RAL

7021

RJ45 ADAPTOR MODULE

Included in voice and data plate

SNAP-FIT RJ45 PLATES

3M® RJ45 connectors

SNAP-FIT TYPE

3M® RJ45 connectors

VERSION

Single

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-038)

INSTALLATION DIRECTION

Vertical according to the direction of the mechanisms

INSTALLATION TYPE

Suitable for surface and flush mounting

REMOVAL OF THE PLATE

Only with tool

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.012

PACKAGING MEASUREMENT

UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT

UNIT

KGM

PACKAGING VOLUME

911400

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8426436040038

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

0.3

UNITS CONTAINED PACKAGING

20

PACKAGING GROSS WEIGHT

4.28

UNITARY PACKAGING VOLUME

UNIT

MMQ

PACKAGING HEIGHT

70

PACKAGING NET WEIGHT

0.24

UNITARY PACKAGING GROSS
WEIGHT

0.012

PACKAGING WIDTH

93

PACKAGING WEIGHT UNIT

KGM

PACKAGING LENGTH

140