


Flush-mount trim cover for adjustable floor box or service cover 8 elements grey Simon 500 Cima

REF. 52053104-035

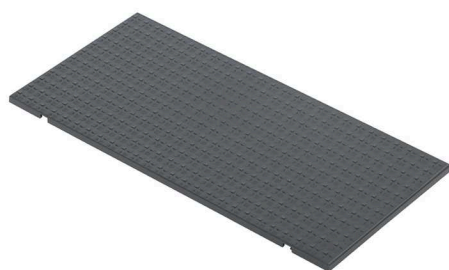

BASIC INFORMATION

DESCRIPTION

Within the series of adjustable floor boxes, Simon 500 Cima, gives the option of complete the installation by adding the Flush-mount trim cover or Service cover for 8 elements, both in a discreet but stylish tone Grey. This cover for Simon 500 Cima grey, it protects the 8 elements of the ingress of dust or other object, at the same time that provides both the access to the indoor of the installation, as the passage of cabling from the raised floor to the surface-mounted. Guaranteeing a total integration with the environment, the trim cover or register Simon 500 Cima, it is compatible with the current voice and data connectors on the market, is a guarantee of security thanks to its manufacturing in halogen-free thermoplastic material and resists overload and temperature changes. Innovation, security and elegance to your home, office or office, thanks to the collection Simon 500 Cima.

FINISH

Grey

PACKAGING CONTENTS

Trim cover

MATERIAL

Plastic

ETIM CLASS

EC002417

REMARKS

Optional element. To combine with the floor box if not installing the same floor finish.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

IK CLASSIFICATION

08

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

AVAILABLE IN

2, 4, 6, 8 and 12 elements

INSULATION RESISTANCE (V-MΩ)

>5 MOhms at 500V

NUMBER OF MODULES

8 modules

DIELECTRIC STRENGTH

No holes or contours, with 2000V at 50 Hz for 1 minute

IP RATING

IP4X

RAL

7011

MAX TEMP DURING CONSTRUCTION WORK (°C)

+90 °C

KIT AVAILABILITY

No

VERSION

8 elements

HEAT RESISTANCE (°C)

+125°C (according rule IEC 60695-10-2)

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER

Only with tool

TYPE OF FASTENING

Using the screws supplied

INSTALLATION TYPE

In raised or concrete floor with adjustable floor boxes or service covers

EXTINGUISHING (°C)

+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

INSTALLATION DIRECTION

Horizontal, Vertical

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053254882

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.134

PRODUCT NET WEIGHT

0.134

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053101544

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

75

PACKAGING WIDTH

165

PACKAGING LENGTH

290

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3.525

PACKAGING VOLUME UNIT

DMQ

PACKAGING GROSS WEIGHT

0

PACKAGING NET WEIGHT

1.34

PACKAGING WEIGHT UNIT

KGM

