


## Flush-mount wall frame and frame holders for 4 double elements white Simon 500 Cima

REF. 51010104-030

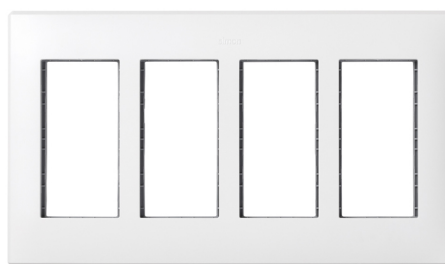

### BASIC INFORMATION

#### FINISH

White

#### MATERIAL

Plastic

#### COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using specific adaptors), combinable with the Simon Trunking range

#### PACKAGING CONTENTS

Flush-mount wall frame, frame holders, metal partition wall, ground connection cable and installation manual

#### ETIM CLASS

EC000007

#### REMARKS

Alternatively, you can screw the frame holders into the box if additional fastening is required.

## TECHNICAL INFORMATION

### AVAILABLE MARKET

CE

### HEAT RESISTANCE (°C)

+125°C (according rule IEC 60695-10-2)

### TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

### AVAILABLE IN

1, 2, 3, 4 and 6 double elements

### IK CLASSIFICATION

07

### NUMBER OF MODULES

8

### DIELECTRIC STRENGTH

No holes or contours, with 2000V at 50 Hz for 1 minute

### INSULATION RESISTANCE (V-MΩ)

>5MΩ at 500V

### RAL

9003

### MAX TEMP DURING CONSTRUCTION WORK (°C)

+90 °C

### IP RATING

IP4X

### RECESS DIMENSION (MM)

141 x 262 mm

### ELECTROMAGNETIC IMMUNITY FOR VDM WIRING

Secured by installing the metal partition wall in the housing fitted into the box for this purpose.

### KIT AVAILABILITY

Yes

### VERSION

4 double elements

### MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

## INSTALLATION AND MAINTENANCE

### REMOVAL OF COMPONENTS

Only with tool

### TYPE OF FASTENING

By direct snap-fit in the selected box (no tools needed for fastening)

### INSTALLATION DIRECTION

Vertical, corresponding with the direction of the mechanisms

### EXTINGUISHING (°C)

+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

### REMOVAL OF THE FRAME

Only with tool

### INSTALLATION TYPE

Suitable for flush mounting on the wall

### INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Specific Simon 500 Cima

## REGULATIONS

### REGULATIONS

Directive 2014/35/UE LVD + EN 60670-1:2005

## LOGISTICS INFORMATION

### UNITARY EAN CODE

8421053254790

### UNITARY PACKAGING HEIGHT

0

### UNITARY PACKAGING WIDTH

0

### UNITARY PACKAGING LENGTH

0

### UNITARY PACKAGING MEASUREMENT UNIT

MMT

### UNITARY PACKAGING VOLUME

0

### UNITARY PACKAGING VOLUME UNIT

MMQ

### UNITARY PACKAGING GROSS WEIGHT

0.257

### PRODUCT NET WEIGHT

0.257

### UNITARY PACKAGING WEIGHT UNIT

KGM

### PACKAGING EAN

8421053091791

### UNITS CONTAINED PACKAGING

5

### PACKAGING HEIGHT

170

### PACKAGING WIDTH

165

### PACKAGING LENGTH

290

### PACKAGING MEASUREMENT UNIT

MMT

### PACKAGING VOLUME

8.134

### PACKAGING VOLUME UNIT

DMQ

### PACKAGING GROSS WEIGHT

0

### PACKAGING NET WEIGHT

1.285

### PACKAGING WEIGHT UNIT

KGM

