

Fuse-holder base for half element for cylindrical fuses 16A 250V~ size5x20 mm white Simon 27 Play

REF. 27000-34



BASIC INFORMATION

DESCRIPTION

We are looking at a socket fuse holder of half element designed for a module, the socket is made for cylindrical fuses with 16A and 250V~ power. It also has convenient dimensions of 5x20 mm in white colour and is operated by means of a cylindrical fuse. It is included in the Simon 27 Play series. For the installation to recess or position, place the piece on the surface-mounted will suffice. The material to socket of metal components with halogen-free insulation and thermoplastic trim is designed to reach temperatures that can oscillate without any inconvenience between 5 and 40°, and can support maximum temperatures of -25 and 50°, as required by the regulation. It is compatible with Marcos Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralizations and Simon 44 Aqua. For proper maintenance use a soft cloth slightly moistened in soapy water, do not use cloths and / or abrasive cleaners containing chlorine.

FINISH

White

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Fuse holder

ETIM CLASS

EC000011

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

16 A

MODE OF OPERATION

Cylindrical fuse

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

IP RATING

IP20

POWER SUPPLY (V~)

250 V~

NUMBER OF POSSIBLE ELEMENTS

Half element

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

INDICATOR FUNCTION

No

VERSION

Single

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, American, Small spaces and Centralisations

INSTALLATION TYPE

Suitable for surface and flush mounting

CLAW

Simon 27

TYPE OF TERMINAL

CONNECTION - FUNCTION 1

Screw

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60127-6:2014 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
23

UNITARY PACKAGING WIDTH
37.5

UNITARY PACKAGING LENGTH
46

UNITARY PACKAGING
MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0.04

UNITARY PACKAGING VOLUME
UNIT
DMQ

UNITARY PACKAGING GROSS
WEIGHT
0.036

PRODUCT NET WEIGHT
0.031

UNITARY PACKAGING WEIGHT
UNIT
KGM

PACKAGING EAN
8421053011171

UNITS CONTAINED PACKAGING
20

PACKAGING HEIGHT
52

PACKAGING WIDTH
102

PACKAGING LENGTH
222

PACKAGING MEASUREMENT
UNIT
MMT

PACKAGING VOLUME
1.177

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0.71

PACKAGING NET WEIGHT
0.62

PACKAGING WEIGHT UNIT
KGM

VISTA FRONTAL E ISOMÉTRICA DEL PRODUCTO



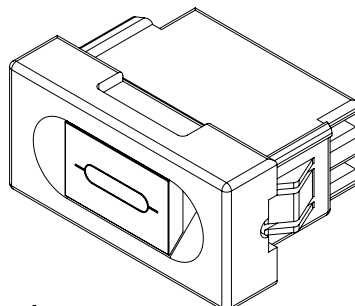


DIAGRAMA DE MONTAJE

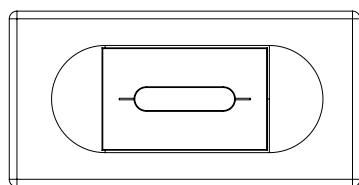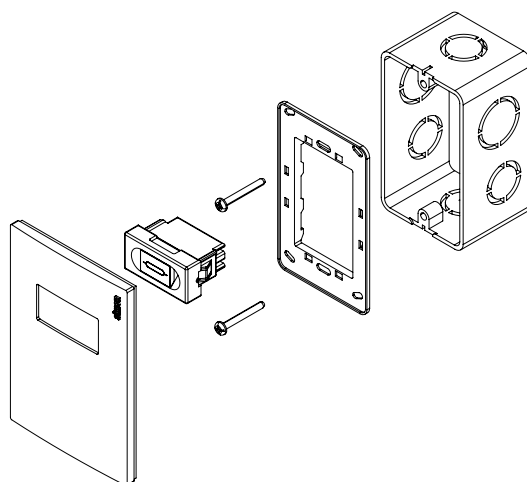

*Placa y chasis NO incluidos