


2-way switch 10AX 230V~ with built-in light and fast terminal connection system aluminium Simon 270

REF. 20000204-093

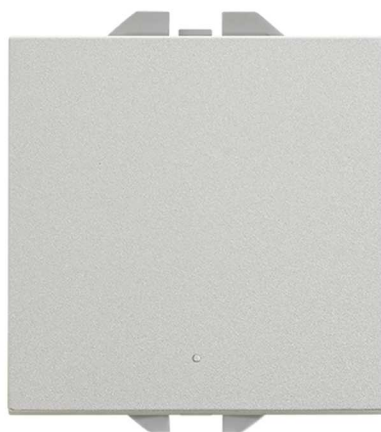

BASIC INFORMATION

FINISH

Matt aluminium

TYPE OF ROCKER

Large

MATERIAL

Thermoplastic

COMPATIBILITY

Simon 270 frames

PACKAGING CONTENTS

Mechanism, cover and instruction sheet

ETIM CLASS

EC001590

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

FREQUENCY

50 - 60 Hz

NOMINAL VOLTAGE (V~)

230 V~

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

INDICATOR FUNCTION

Yes

OPERATING TEMPERATURE

RANGE (°C)

5 - 45 °C

CONSUMPTION INDICATOR (mA)

1 mA

CURRENT (A)

10 AX

POWER SUPPLY (V~)

230 V~

TYPE OF COVER

Large

IP RATING

IP20

RAL

9006

NUMBER OF POSSIBLE ELEMENTS

1 element

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

STORAGE TEMPERATURE RANGE (°C)

-25 - 75 °C

FORMAT

Fast

TYPE OF MECHANISM

Pivoting

VOLTAGE (V~)

127/230 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

15

INSTALLATION DIRECTION

Horizontal, Vertical

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION TYPE

Suitable for surface and flush mounting

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053268162

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.029

PRODUCT NET WEIGHT

0.029

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053268179

UNITS CONTAINED PACKAGING

5

PACKAGING HEIGHT

47.75

PACKAGING WIDTH

104

PACKAGING LENGTH

262

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

1301092

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0

PACKAGING NET WEIGHT

0.145

PACKAGING WEIGHT UNIT

KGM

