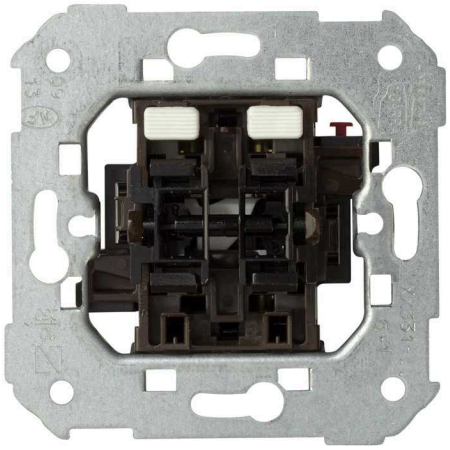
Group of 2 push buttons for shutters 10 A 250V~ with interlocking system Simon 75

REF. **75331-39**



BASIC INFORMATION

DESCRIPTION

With the group of 2 push buttons for controlling shutters from the Simon 75 collection, you will achieve the most appropriate finishes for the space thanks to its wide range of color combinations, combined with the functionalities and the technological innovation characteristic of Simon. Composed of isolated metallic materials with halogen-free thermoplastic, it provides safety in the room in case of fire, able to withstand maximum temperatures from -25 to 50 ºC. With an accepted cable section of 1.5 to 2.5 mm and stripping of 11 mm, the group of 2 push buttons Simon 75 is suitable for flush-mounted or surface installation, expanding the aesthetic and functional possibilities of the specific space. In addition, it is compatible with a power supply voltage of 250 Volts and 10 Amperes of current with modular width (10:00 AM) and can be combined with the mechanisms of the Simon 77 range for a quick and convenient installation. Simon 75 has equipped this group of 2 push buttons with safety interlocking that prevents simultaneous actuation.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept and Simon 82.

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC000044

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

NUMBER OF CONTACTS
5

NUMBER OF POSSIBLE ELEMENTS
1 element

INDICATOR FUNCTION
No

CURRENT (A)
10 A

IP RATING
IP20

LATCH TYPE
Mechanical

LINKABLE
No

TYPE OF MECHANISM
Pivoting

OPERATING TEMPERATURE RANGE (°C)
5 - 40 °C

RECESS DIMENSION (MM)
35

STORAGE TEMPERATURE RANGE (°C)
-25 - 50 °C

VERSION
Double

VOLTAGE (V~)
250 V~

NUMBER OF WIRES
5

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
11

CLAW
Simon 27

REMOVAL OF COVER
Only with tool

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Fast

REGULATIONS

REGULATIONS
Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053255964

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.068

PRODUCT NET WEIGHT
0.068

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053003961

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
82

PACKAGING WIDTH
165

PACKAGING LENGTH
223

PACKAGING MEASUREMENT UNIT
MMT

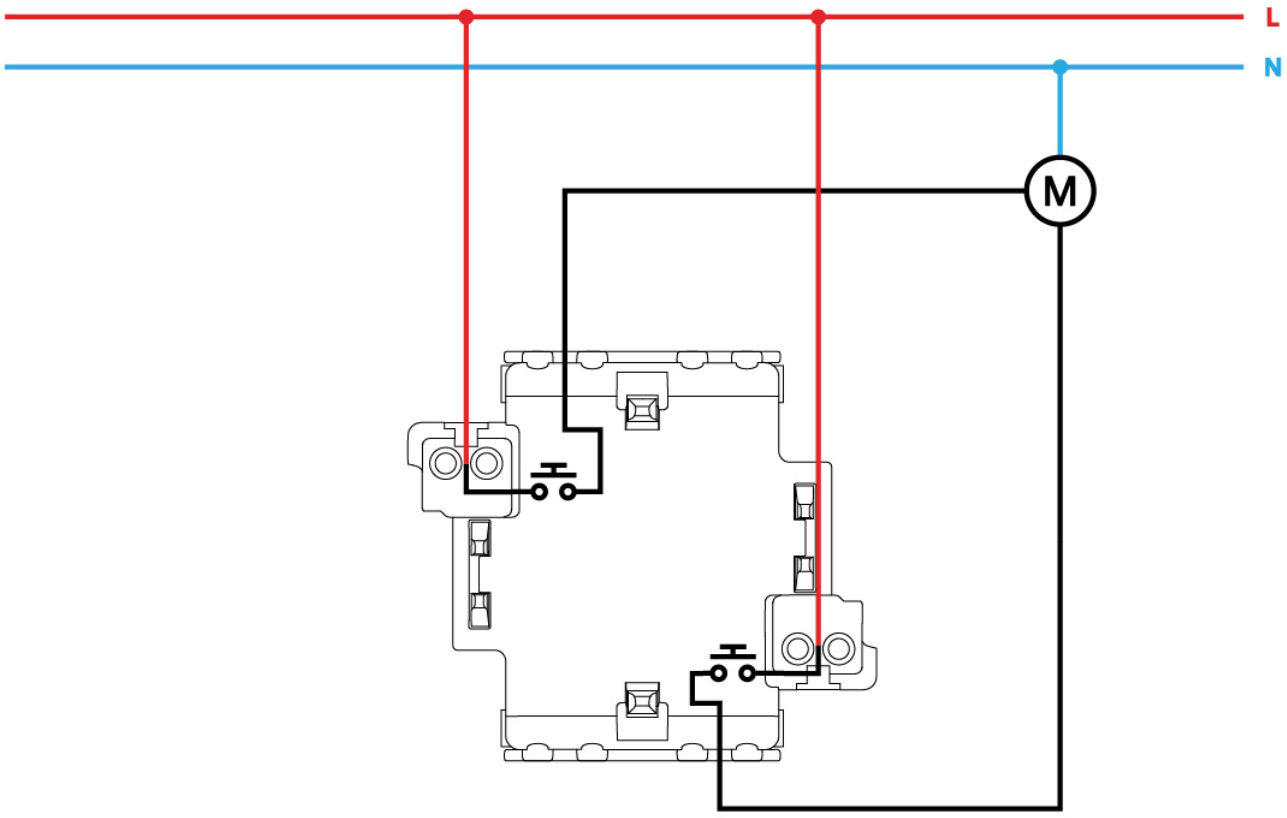
PACKAGING VOLUME
3026595

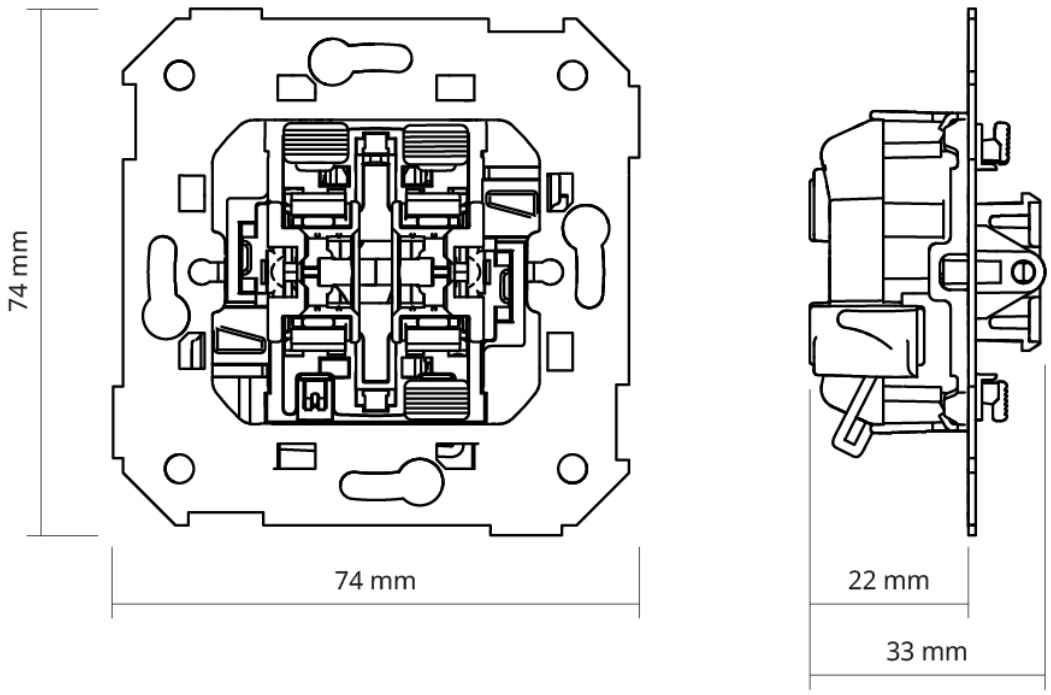
PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.68

PACKAGING NET WEIGHT
0.68

PACKAGING WEIGHT UNIT
KGM


L
N
M


74 mm
74 mm
22 mm
33 mm