


Group of 2 switches 10 AX 250V~ with quick terminal connection system Simon 75

REF. 75398-39

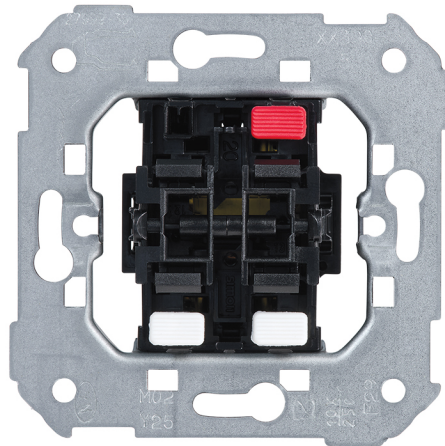

BASIC INFORMATION

DESCRIPTION

Group of 2 unipolar switches 10 AX 250 V~ Simon 75 with quick terminal connection system, designed for the independent cut and closure of two lighting circuits from a single mechanism. It supports a nominal current of 10 AX at 250 V~ 50 Hz, offering an efficient and safe solution for residential and professional installations. It incorporates an insertion connection system that facilitates agile and reliable wiring, accommodating conductors from 1.5 to 2.5 mm² with 11 mm stripping. Its tilting operation ensures precise and durable maneuvering for frequent use. Manufactured with metal components and halogen-free thermoplastic insulation, in accordance with EN 60669-1 standards and applicable European directives, it provides safety, durability, and full compatibility with the Simon 75 series and compatible frames.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept and Simon 82.

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC001590

TECHNICAL INFORMATION

AVAILABLE MARKET CE	CURRENT (A) 10 AX	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	IP RATING IP21	RECESS DIMENSION (MM) 30
NUMBER OF CONTACTS 3	LINKABLE No	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
NUMBER OF POSSIBLE ELEMENTS 1 element	TYPE OF MECHANISM Pivoting	VERSION Double
FREQUENCY 50 Hz	MONOBLOCK No	VOLTAGE (V~) 250 V~
INDICATOR FUNCTION No	NOMINAL VOLTAGE (V~) 250 V~	NUMBER OF WIRES 4

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 11	REMOVAL OF COVER Only with tool	INSTALLATION TYPE Suitable for surface and flush mounting
CLAW Simon 27	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2015

LOGISTICS INFORMATION

UNITARY EAN CODE 8421053256046	UNITARY PACKAGING GROSS WEIGHT 0.062	PACKAGING LENGTH 165
UNITARY PACKAGING HEIGHT 0	PRODUCT NET WEIGHT 0.062	PACKAGING MEASUREMENT UNIT MMT
UNITARY PACKAGING WIDTH 0	UNITARY PACKAGING WEIGHT UNIT KGM	PACKAGING VOLUME 3026595
UNITARY PACKAGING LENGTH 0	PACKAGING EAN 8421053003992	PACKAGING VOLUME UNIT MMQ
UNITARY PACKAGING MEASUREMENT UNIT MMT	UNITS CONTAINED PACKAGING 10	PACKAGING GROSS WEIGHT 0.625
UNITARY PACKAGING VOLUME 0	PACKAGING HEIGHT 221	PACKAGING NET WEIGHT 0.62
UNITARY PACKAGING VOLUME UNIT MMQ	PACKAGING WIDTH 83	PACKAGING WEIGHT UNIT KGM

