

Push-button switch with bell symbol 10A 250V~ and fast terminal connection system white Simon 27 Play

REF. 27150-65



BASIC INFORMATION

DESCRIPTION

Push-button switch with engraving of a bell symbol with an intensity of 10 A and a power of 250 V~ incorporates a system of fast-terminals connection with white finish in colour, which you can find in the category "control mechanisms" of the Simon 27 Play series. The Simon 27 Play collection has solutions for all kinds of environments, offering different options to improve even the elements. You can include the antibacterial system that is ideal for public places such as nurseries, health centers and hospitals. In addition, another option may be to extend the service life of our elements by adding IP44 sealing property to protect the element from water and dust. Enjoy decorating with the customizable elements of the Simon 27 Play series, take advantage of the multiple options offered by the rockers and interchangeable covers, simply click on the frame to customize each element and adapt it to every corner of your home.

FINISH

White

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Mechanism with rocker

ETIM CLASS

EC000029

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

10 A

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

IP RATING

IP20

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

NUMBER OF POSSIBLE ELEMENTS

1 element

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

VERSION

Single

INDICATOR FUNCTION

No

TYPE OF MECHANISM

Pivoting

VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, American and Centralisations

INSTALLATION TYPE

Suitable for surface and flush mounting

CLAW

Simon 27

INSTALLATION DIRECTION

Horizontal, Vertical

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053251591

UNITARY PACKAGING HEIGHT

45.5

UNITARY PACKAGING WIDTH

38.5

UNITARY PACKAGING LENGTH

45.5

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0.08

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.03

PRODUCT NET WEIGHT

0.03

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053035610

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

53

PACKAGING WIDTH

105

PACKAGING LENGTH

220

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

1.224

PACKAGING VOLUME UNIT

DMQ

PACKAGING GROSS WEIGHT

0.31

PACKAGING NET WEIGHT

0.3

PACKAGING WEIGHT UNIT

KGM

MECANISMOS SIMON 27, 28 Y 44

Mecanismos básicos / Basic switches



Interruptor unipolar / Single-pole switch
XX00101-XX



Pulsador / Push button switch
XX00150-XX



Interruptor bipolar / Double pole switch
XX00133-XX



Conmutador / 2-way switch
XX00201-XX



Conmutador cruce / Intermediate switch
XX00251-XX

Mecanismos con piloto / Pilot switches



Interruptor unipolar / Single-pole switch
XX00102-XX



Interruptor bipolar / Double pole switch
XX00134-XX



Conmutador / 2-way switch
XX00202-XX



Interrupor unipolar / Single-pole switch
XX00104-XX



Pulsador / Push button switch
XX00160-XX



Conmutador / 2-way switch
XX2700204-XX



Conmutador cruce / Intermediate switch
XX2700254-XX

VISTA FRONTAL E ISOMÉTRICA DEL PRODUCTO


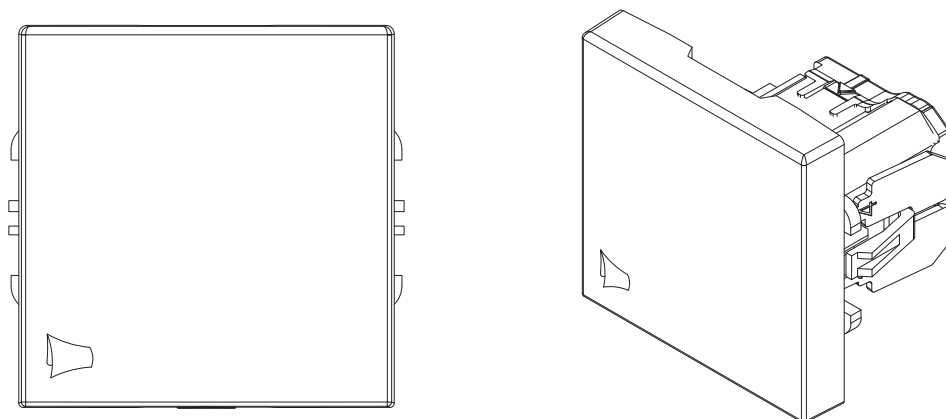


DIAGRAMA DE MONTAJE



*Placa y chasis NO incluidos

DIAGRAMA DE CONEXIÓN

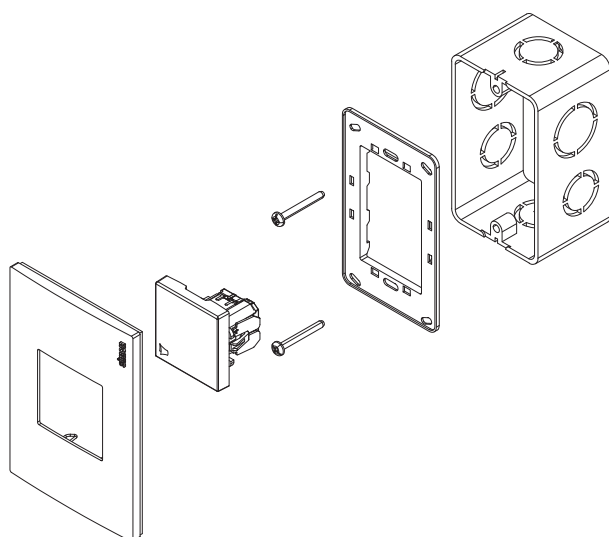