


Voice and data flat plate without dust cover for 1 element for 1 3M® RJ45 connector white Simon K45

REF. K045/9

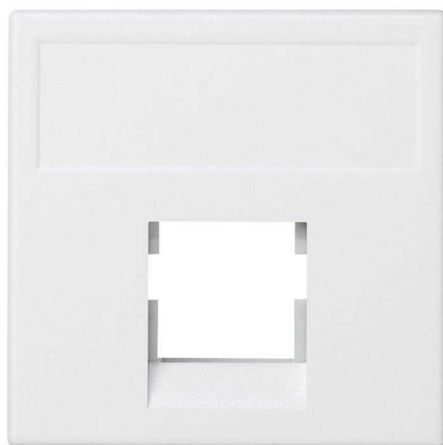

BASIC INFORMATION

DESCRIPTION

This flat voice plate for 1 element for 1 RJ45 connector from 3M and without dust cover is white and is available in the Simon K45 series. It has dimensions of 45x45 mm and a depth of 8.5 mm and is manufactured in halogen-free thermoplastic material, ensuring the no-propagation of the flame is a number fire. It is in compliance with the regulations and is suitable for surface and flush mounting. If you combine this voice and data plate in vertical enclosures, it is necessary to use the 90° positioner with the aim to guide the plate in vertical. The series Simon K45 offers a wide range of panels and connectors as a complete solution to facilitate the workplace solutions. The plates, are also compatible with any connector that can be found on the market, so that it is easily combinations.

FINISH

White

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-030)

PACKAGING CONTENTS

Flat voice and data plate without dust cover

ETIM CLASS

EC000018

REMARKS

When combining the voice and data plate in vertical housings (mini columns, columns, Teleblock, channels, mechanism holders, etc.) you must use the 90° positioner (ref. K66) to guide the plate into a vertical position.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

DUST SHUTTER

No

NUMBER OF MODULES

Half

AVAILABLE IN

Plate for 1 and 2 RJ45 connectors

FORMAT

RJ45

PLATE TYPE

Flat

COMPATIBLE WITH CONNECTORS

Volition OCK®, RJ45, K5e and K6 from 3M®.

IP RATING

IP20

RAL

9003

KIT AVAILABILITY

No

RJ45 ADAPTOR MODULE

Included in voice and data plate

RJ45 CONNECTORS

Not included in voice and data plate

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

SNAP-FIT RJ45 PLATES

3M® RJ45 connectors

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60° C

SNAP-FIT TYPE

3M® RJ45 connectors

DUST PROTECTION

No

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60° C

VERSION

Single

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-030)

INSTALLATION DIRECTION

Vertical according to the direction of the mechanisms

INSTALLATION TYPE

Suitable for surface and flush mounting

REMOVAL OF THE PLATE

Only with tool

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.012

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING VOLUME

911400

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8426436040021

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

0.3

UNITS CONTAINED PACKAGING

20

PACKAGING GROSS WEIGHT

4.28

UNITARY PACKAGING VOLUME UNIT

MMQ

PACKAGING HEIGHT

70

PACKAGING NET WEIGHT

0.24

UNITARY PACKAGING GROSS WEIGHT

0.012

PACKAGING WIDTH

93

PACKAGING WEIGHT UNIT

KGM

PACKAGING LENGTH

140