


Stand-alone emergency light with LED status indicator

REF. 75809-39

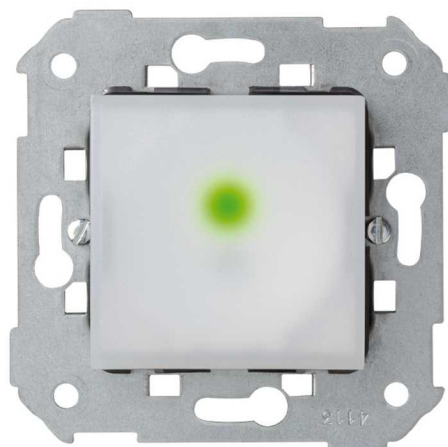

BASIC INFORMATION

DESCRIPTION

Standalone emergency beacon with status indicator led. Requires a charging time of 24 hours and is part of the Simon 75 series, the power supply is 230 V. This is the individual version of a single element. The clamp necessary is from the Simon 27 series. It has a signaling function and the wire that supported is 1.5 to 2.5 millimetres. The stripping of wire necessary is 10 millimetres. The temperature range of this beacon signal is 0 to 40 degrees centigrade, although the Simon 75 product support much more extreme temperatures, of -20 to + 75 degrees centigrade in total. The emergency beacon Simon is manufactured with metal components with halogen-free insulation, without any type of that guarantee maximum security and versatility. The typology of the product is of operation stand-alone and has a frequency of 50-60 Hz. The luminous beam is 5 lux. It is worth noting that the life of the product is of a time. It has an indicator for connection to the mains, two pins, two wires and a single controllable circuit. It can be installed in surface-mounted or recessed.

COMPATIBILITY

Simon 75, Simon 82 Detail, Simon 82 Nature and Simon 82 frames

PACKAGING CONTENTS

Emergency light and instruction sheet

ETIM CLASS

EC000064

REMARKS

Charge time 24 hours

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

COMPATIBLE 12V AC/DC

No

COMPATIBLE 230V AC/DC

Yes

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

BATTERY LIFE

1 hour

NUMBER OF CONTACTS

2

NUMBER OF CONTROLLABLE CIRCUITS

1

NUMBER OF POSSIBLE ELEMENTS

1 element

FREQUENCY

50 - 60 Hz

INDICATOR FUNCTION

Yes

IP RATING

IP20

LIGHT BEAM

Yes

MAXIMUM QUANTITY PER CIRCUIT

No limitation

OPERATING TEMPERATURE RANGE (°C)

0 - 40 °C

POWER SUPPLY (V~)

230 V~

POWER SUPPLY CONNECTION INDICATOR

Yes

STORAGE TEMPERATURE RANGE (°C)

-20 - 75 °C

TYPE

Stand-alone

VERSION

Single

NUMBER OF WIRES

2

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

10

CLAW

Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION TYPE

Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

REGULATIONS

REGULATIONS

UNE-EN 60598-2-22:1999 + A1:2003

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053033005

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

329232

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.11

PRODUCT NET WEIGHT

0.11

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053033005

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

57

PACKAGING WIDTH

76

PACKAGING LENGTH

76

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

329232

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.11

PACKAGING NET WEIGHT

0.11

PACKAGING WEIGHT UNIT

KGM