Adaptor plate for Simon 27 mechanical mechanisms for 1 element white Simon 500 Cima

REF. **50010088-030**



BASIC INFORMATION

DESCRIPTION

Adaptative plate for Simon 27 mechanic mechanisms (in case of installing Simon 27 Play electronic mechanisms is necessary to use the reference 50011088-030), for 1 element, in white colour and belonging to the Simon 500 Cima series. With 1 module, and it is suitable for installation on the surface-mounted or by flush mounted, in places with a temperature located between the -5 to 60 ° C, although it can withstand extreme temperatures greater and is that it can withstand more than 60 ° C in the installation wall surface-mounted and more than 90 ° C in flush installation. Complies with the regulation European UNE -s 60670-1: 2006 and is made of halogen-free thermoplastic, this material is very safe as to prevent the propagation of the fire guarantees in case of fire and low toxicity in case of smoke. Its dimensions are 50 x 50 x 10,7 mm and to clean it, you will have to wipe it with a soft and dry cloth and never use or abrasive cleaners or cloths that contain chlorine in its formula.

FINISH

White

MATERIAL

Plastic

COMPATIBILITY

Simon 27 Play mechanical mechanisms

PACKAGING CONTENTS

Adaptor plate for Simon 27 mechanical mechanisms for 1 element

ETIM CLASS

EC002649

REMARKS

If installing Simon 27 Play electronic mechanisms, you will need to use article no. 50011088-030

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

AVAILABLE IN
Adaptor for Simon 27 Play mechanical mechanisms for 1 and 2 elements, with a specific version for Simon 27 Play electronic mechanisms for 1 element

MAX TEMP DURING CONSTRUCTION WORK (ºC)
+60 ºC in surface-mount wall installation and +90 ºC in flush-mount wall installation

IP RATING
IP20

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (ºC)
-5 to 60 ºC

NUMBER OF MODULES
1

RAL
9003

VERSION
1 element

INSTALLATION AND MAINTENANCE

TYPE OF FASTENING
By direct snap-fit in the selected enclosure (no tools needed for fastening))

INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE
Suitable for surface or flush-mount installation

REMOVAL OF THE PLATE
Only with tool

REGULATIONS

REGULATIONS
UNE-EN 60.670-1:2006

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.007

PRODUCT NET WEIGHT
0.007

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053095690

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
70

PACKAGING WIDTH
93

PACKAGING LENGTH
140

PACKAGING MEASUREMENT UNIT
MMT

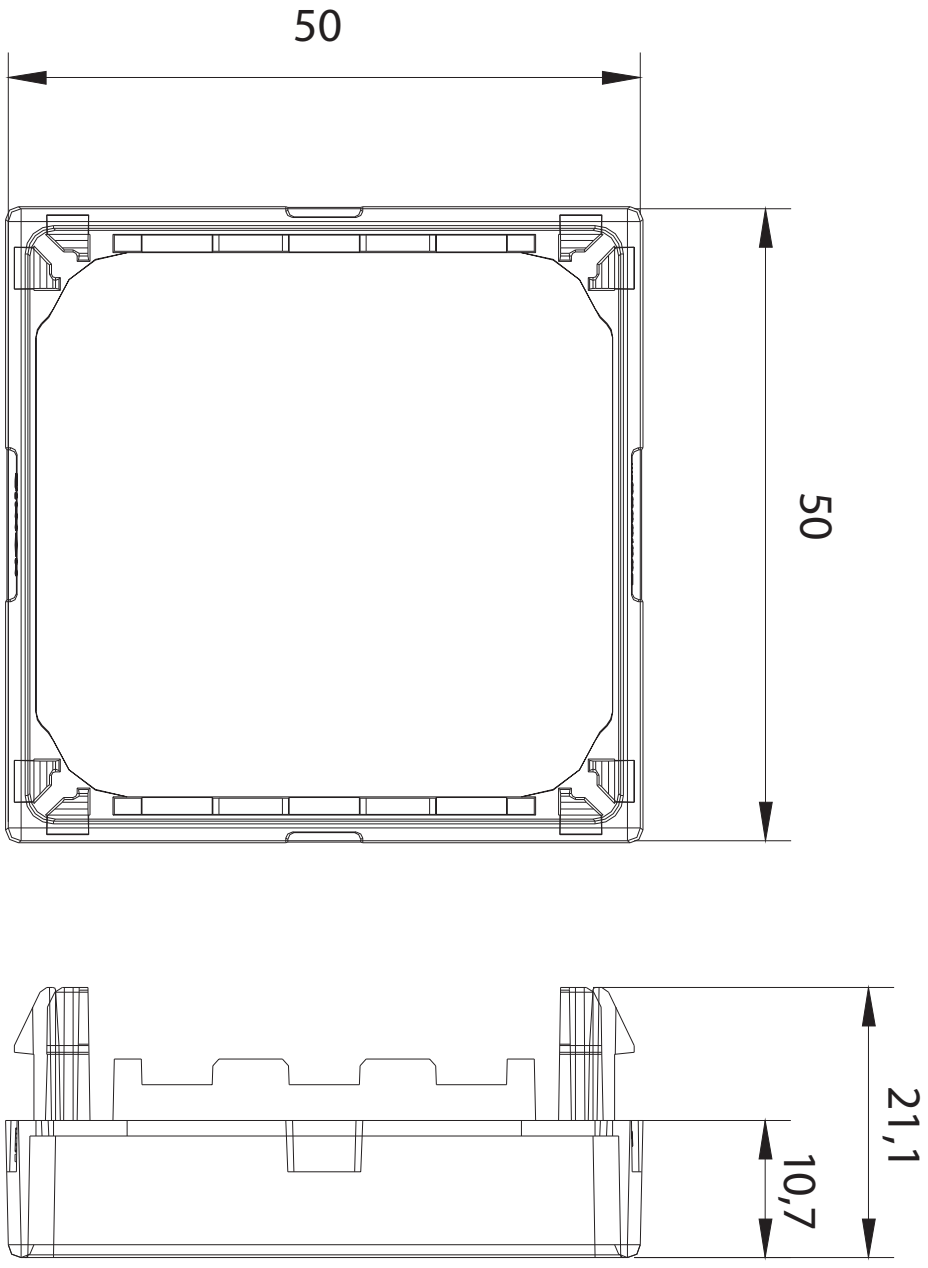
PACKAGING VOLUME
911400

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.07

PACKAGING WEIGHT UNIT
KGM


50
50
21,1
10,7