


Mechanism for creating 4 different lighting scenes

REF. 75326-39

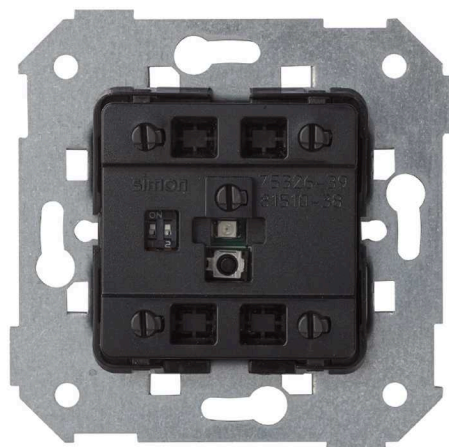

BASIC INFORMATION

DESCRIPTION

To each space a different lighting, thanks to the Simon 82 mechanism for creation of 4 different lighting scenarios, with switch of control of infrared. With screw terminal connection and suitable for installation, recessed or surface-mounted, it fits perfectly into any type of space, also, thanks to its simple design with minimalist lines and combination of colours and textures. Supports, in addition, a cable section of 1.5 to 2.5 mm with a stripped 10 mm It is compatible with a power of 230 Volts, 50 Hz and electromagnetic transformers 500 VA. Consists of a total of 10 wires and 4 circuits to ensure a perfect adjustment of light intensity to adapt to each room. Composed of electrical materials isolated with halogen-free thermoplastic, it protects the room in case of fire, supporting a temperature range of installation from 0 to 40 ° C and a maximum 70 °C.

COMPATIBILITY

Simon 75, Simon 82 Detail,
Simon 82 Nature and Simon 82
frames

COMPATIBLE WITH MECHANICAL PUSH BUTTON

No

COMPATIBLE WITH MECHANICAL SWITCH

No

PACKAGING CONTENTS

Scene creator and instruction
sheet

ETIM CLASS

EC004265

REMARKS

Does not need programming.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

NUMBER OF CONTACTS
10

NUMBER OF CONTROLLABLE
CIRCUITS
4

COMPATIBLE WITH HALOGENS
WITH ELECTRONIC
TRANSFORMER (W)
500 VA

NUMBER OF POSSIBLE
ELEMENTS
1 element

COMPATIBLE WITH
FLUORESCENT LAMPS WITH 1-
10V DIMMABLE ELECTRONIC
BALLAST
No

COMPATIBLE WITH
FLUORESCENT LAMPS (VA)
1200 VA Non-compensated

FREQUENCY
50 Hz

INDICATOR FUNCTION
No

IP RATING
IP20

COMPATIBLE WITH LOW
CONSUMPTION (W)
No

TYPE OF MECHANISM
Push / IR

COMPATIBLE WITH MOTORS (VA)
No

OPERATING TEMPERATURE
RANGE (°C)
0 - 40 °C

MODE OF OPERATION
4 lighting ambients

POWER SUPPLY (V~)
230 V~

STORAGE TEMPERATURE RANGE
(°C)
20 - 75 °C

VERSION
Single

NUMBER OF WIRES
10

INSTALLATION AND MAINTENANCE

BUS CONNECTION TYPE OF
TERMINAL CONNECTION
Por inserción

CABLE STRIPPING NECESSARY
(MM)
10

CLAW
Included

INSTALLABLE IN FLUSH MOUNT
JUNCTION BOX
Universal

INSTALLATION TYPE
Suitable for surface and flush
mounting

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2014/30/UE EMC | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-2-1:2004 | EN 60669-2-1:2004 A1:2009 | EN 60669-2-1:2004 A12:2010 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053071038

PRODUCT NET WEIGHT

0.1

PACKAGING MEASUREMENT

UNIT

MMT

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WEIGHT

UNIT

KGM

PACKAGING VOLUME

0.329

UNITARY PACKAGING WIDTH

0

PACKAGING EAN

8421053071038

PACKAGING VOLUME UNIT

DMQ

UNITARY PACKAGING LENGTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING GROSS WEIGHT

0.1

UNITARY PACKAGING VOLUME

329232

PACKAGING HEIGHT

57

PACKAGING NET WEIGHT

0.1

UNITARY PACKAGING VOLUME UNIT

MMQ

PACKAGING WIDTH

76

PACKAGING WEIGHT UNIT

KGM

UNITARY PACKAGING GROSS WEIGHT

0.1

PACKAGING LENGTH

76