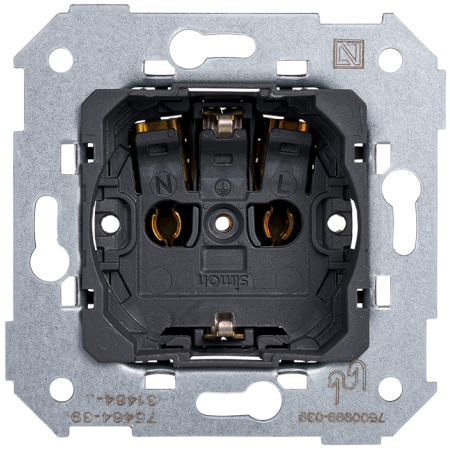
# Schuko socket base 16 A 250V~ with quick terminal connection system Simon 75

REF. **75464-39**



## BASIC INFORMATION

### DESCRIPTION

Schuko socket base 16 A 250 V~ Simon 75 with quick terminal connection system, designed to ensure a safe and efficient electrical connection in residential and professional installations. It supports a rated current of 16 amperes at 250 V~, offering reliable performance for power supply in all types of spaces. It incorporates an insertion connection system that facilitates a quick and safe installation, optimizing assembly times. The covers include integrated child protection to enhance safety in the home environment. Made with metallic components and halogen-free thermoplastic insulation, in accordance with IEC 60884-1 standards, it provides durability, resistance, and a high level of safety within the Simon 75 series and compatible frames.

### MATERIAL

Plastic,Metal

### COMPATIBILITY

Marcos Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept and Simon 82.

### PACKAGING CONTENTS

Socket outlet

### ETIM CLASS

EC000125

### REMARKS

The covers include the child protection feature.

## TECHNICAL INFORMATION

**AVAILABLE MARKET**
CE

**CABLE SECTION ADMITTED (MM)**
2,5 mm

**CONNECTOR TYPE**
Schuko

**NUMBER OF POSSIBLE ELEMENTS**
1 element

**FORMAT**
Schuko

**FREQUENCY**
50 Hz

**INDICATOR FUNCTION**
No

**CURRENT (A)**
16 A

**IP RATING**
IP21

**LINKABLE**
Yes

**TYPE OF MECHANISM**
Insertion

**MONOBLOCK**
No

**NOMINAL VOLTAGE (V~)**
250 V~

**OPERATING TEMPERATURE RANGE (°C)**
5 - 40 °C

**RECESS DIMENSION (MM)**
40

**STORAGE TEMPERATURE RANGE (°C)**
-25 - 50 °C

**VERSION**
Single

**VOLTAGE (V~)**
250 V~

**NUMBER OF WIRES**
6

## INSTALLATION AND MAINTENANCE

**CABLE STRIPPING NECESSARY (MM)**
14

**CLAW**
Simon 75

**REMOVAL OF COVER**
Only with tool

**INSTALLABLE IN FLUSH MOUNT JUNCTION BOX**
Universal

**INSTALLATION TYPE**
Suitable for surface and flush mounting

**TYPE OF TERMINAL CONNECTION - FUNCTION 1**
Fast

## REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + EN 50581:2012 + IEC 60884-1 Ed 3.2

## LOGISTICS INFORMATION

UNITARY EAN CODE

8421053256169

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

3026595

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.069

PRODUCT NET WEIGHT

0.069

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053041710

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

83

PACKAGING WIDTH

165

PACKAGING LENGTH

221

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3026595

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

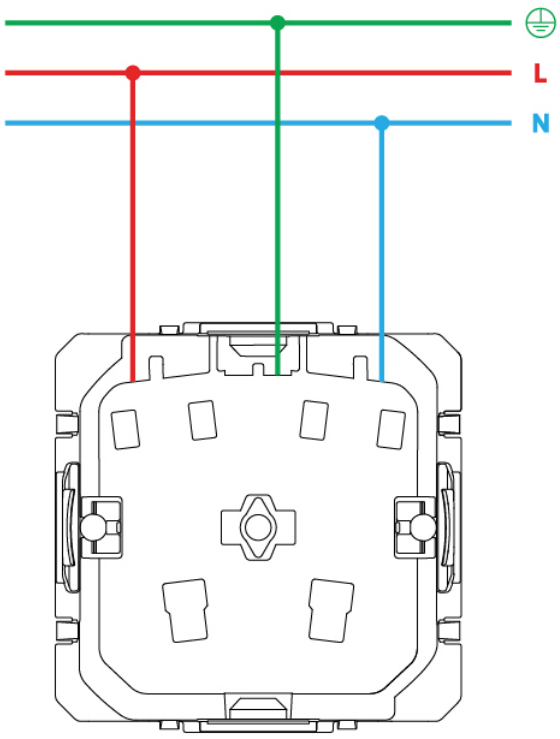
0.691

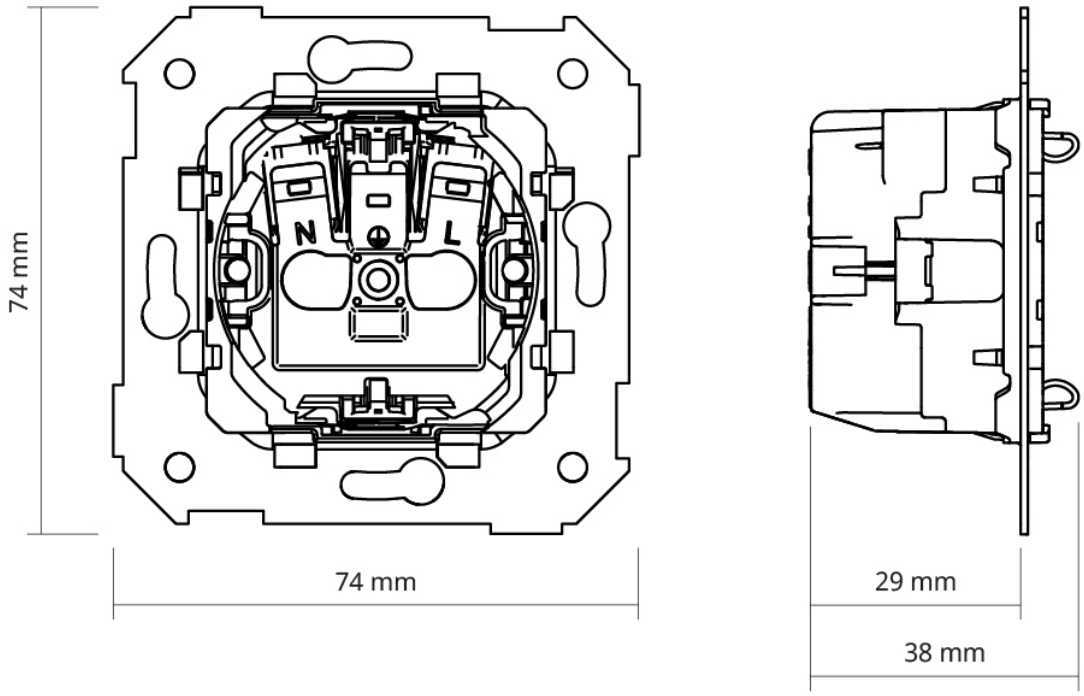
PACKAGING NET WEIGHT

0.69

PACKAGING WEIGHT UNIT

KGM


L
N


74 mm
N
L
74 mm
29 mm
38 mm