Flush trim cover for adjustable floor box or 8 elements registry plate graphite Simon 500 Cima

REF. **52053104-038**



BASIC INFORMATION

DESCRIPTION

To protect the electrical installations with innovative elements is the objective of the accessories included in the Simon 500 Cima series. This starting point the complies perfectly the Flush-mount trim cover for adjustable floor box or service cover with eight elements finished in graphite of the Simon 500 Cima series, an element that includes optional element to combine with the floor box if not installing the same floor lining. With dimensions of 118 x 247 x 5 mm, this cover allows you to change the image of our rooms in a simple way, its installation is done in concrete floor and raised floor through the adjustable floor boxes or inspection covers. It has been designed with halogen-free thermoplastic compose its structure, a material that guarantees no flame propagation in case of fire and low toxicity in the event of smoke generation.

FINISH

Graphite

PACKAGING CONTENTS

Trim cover

MATERIAL

Plastic

ETIM CLASS

EC002417

REMARKS

Optional element. To combine with the floor box if not installing the same floor finish.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

AVAILABLE IN
2, 4, 6, 8 and 12 elements

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (ºC)
+90 ºC

HEAT RESISTANCE (ºC)
+125ºC (according rule IEC 60695-10-2)

IK CLASSIFICATION
08

INSULATION RESISTANCE (V-MΩ)
>5 MOhms at 500V

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (ºC)
-5 to 60 ºC

NUMBER OF MODULES
8 modules

RAL
7021

VERSION
8 elements

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER
Only with tool

EXTINGUISHING (ºC)
+850 ºC / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING
Using the screws supplied

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
In raised or concrete floor with adjustable floor boxes or service covers

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.136

PRODUCT NET WEIGHT
0.136

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053101551

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
75

PACKAGING WIDTH
165

PACKAGING LENGTH
290

PACKAGING MEASUREMENT UNIT
MMT

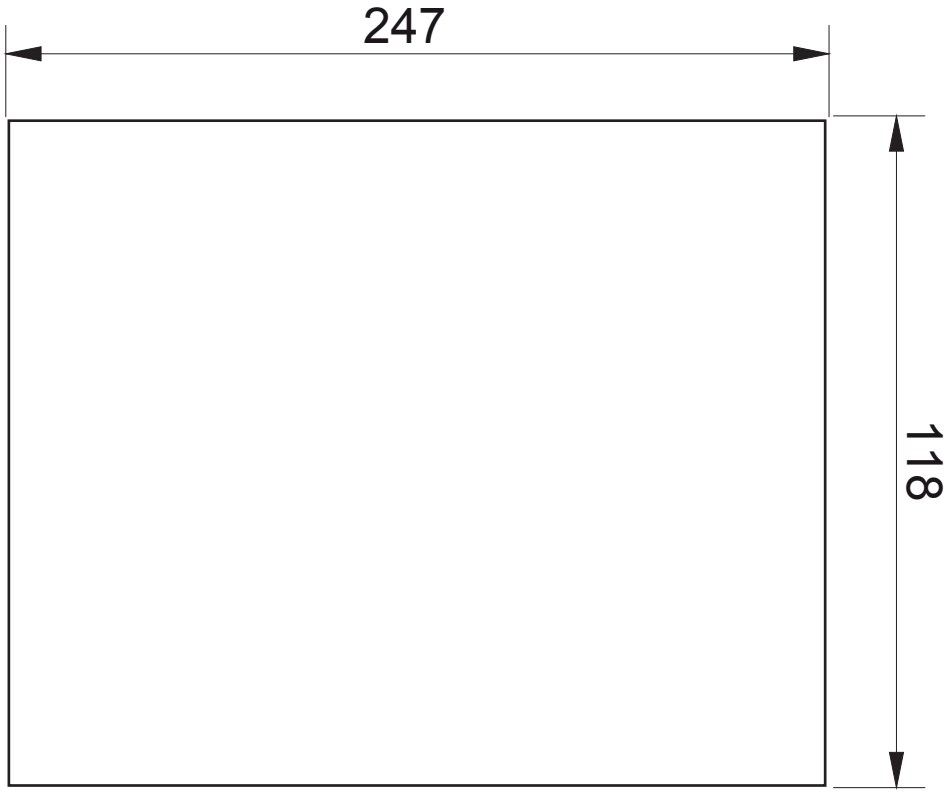
PACKAGING VOLUME
3.525

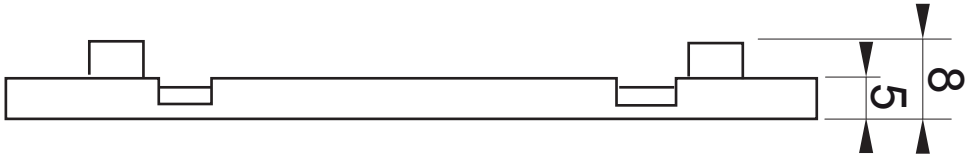
PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
1.36

PACKAGING WEIGHT UNIT
KGM


247
118


8
5