ARCH Downlight Flush-mounted Round 3000 K Wide Flood 1-10 V Black

REF. **91551003-388**



BASIC INFORMATION

FINISH	APPLICATION	PACKAGING DIMENSIONS (MM)
Black	Domestic,Office,Retail,Hotel,Contract	116x224x171 mm
BODY MATERIAL	**PACKAGING CONTENTS**	**ETIM CLASS**
Die-cast aluminium	1 Unit	EC001744

TECHNICAL INFORMATION

FREQUENCY
50 - 60 Hz

IP RATING
IP43

OPERATING TEMPERATURE RANGE (°C)
0 - 35 °C

POWER SUPPLY (V~)
220/240 V~

RAL
9005

COLOR TEMPERATURE (K)
3000 K

CONTROL
1-10 V,Push Dim

CRI
90

DIRECTIONAL
Yes

DRIVER INCLUDED
Yes

ELECTRICAL CLASS
II

ENERGY EFFICIENCY
A+

L70 (°C)
100000h at 25°C

L90 (°C)
30000h at 25°C

COLOR TYPE
NW

LIGHTING EFFICIENCY (LM/W)
111 lm/W

LUMENS (LM)
600 lm

NUMBER OF LUMINAIRES
1

MACADAM STEPS
<3 Step MacAdam


OPTICS
Wide Flood 60°

PHOTOBIOLOGICAL CLASSIFICATION
Class II

POWER FACTOR (Φ)
> 0,55

POWER (W)
9 W

PHOTOMETRY ASSETS – POLAR

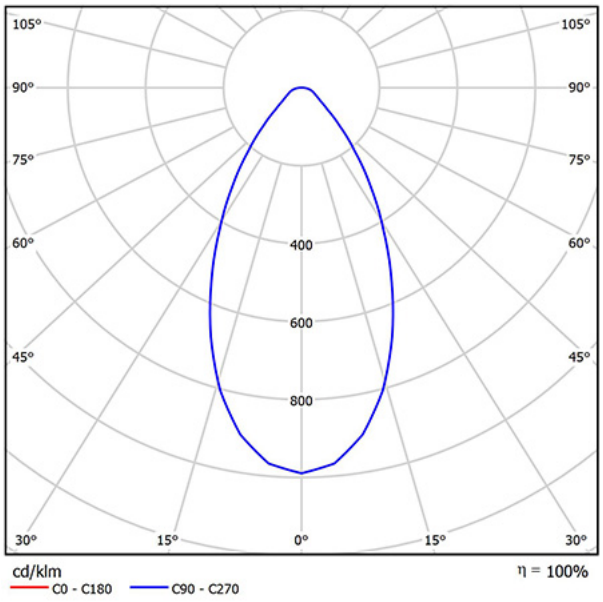

INSTALLATION AND MAINTENANCE

INSTALLATION ALTERNATIVES
Surface-mounted, Trimless

INSTALLATION TYPE
Flush-mounted

REGULATIONS

EAC MARKED
Yes

ECORRAE MARKED
Yes

WARRANTY
5 years

LOGISTICS INFORMATION

UNITARY EAN CODE
8436547035090

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.9

PRODUCT NET WEIGHT
0.719

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8436547035090

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
116

PACKAGING WIDTH
171

PACKAGING LENGTH
224

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
4528125

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.99

PACKAGING NET WEIGHT
0.719

PACKAGING WEIGHT UNIT
KGM