


Two-way switch 10 AX 250V~ with quick terminal connection Simon 75

REF. 75201-39

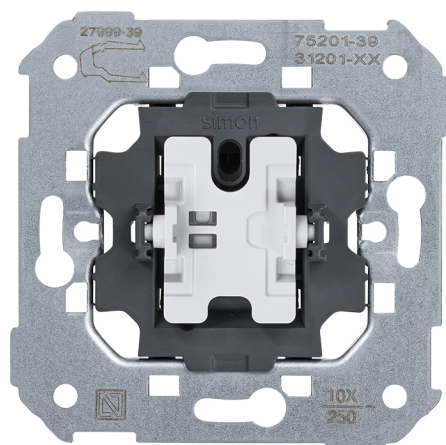

BASIC INFORMATION

DESCRIPTION

Two-way switch with an intensity of 10 AX and a power of 250 V~ including a quick terminal connection system that allows for easy, comfortable, and quick installation of the element; this is thanks to its compatibility with the mechanisms of the Simon 77 series. Because of this, you can have the element installed in a matter of minutes, without wasting a second; you simply need to insert and tighten the mechanism for it to be correctly installed. The element from the Simon 75 series also has the possibility to implement signaling function through a signaling support and key with viewer. The switch is manufactured with the best metallic components with thermoplastic insulation free of halogens, providing you with an element of the best possible quality to perform in different temperature ranges.

MATERIAL

Plastic, Metal

COMPATIBILITY

Marcos Simon 75, Simon 82
Detail, Simon 82 Nature, Simon
82 Concept and Simon 82

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC001590

REMARKS

Possibility of implementing signalling function using cradle blinking and rocker with viewer

TECHNICAL INFORMATION

AVAILABLE MARKET CE	CURRENT (A) 10 AX	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	IP RATING IP21	RECESS DIMENSION (MM) 40
NUMBER OF CONTACTS 3	LINKABLE No	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
NUMBER OF POSSIBLE ELEMENTS 1 element	TYPE OF MECHANISM Pivoting	VERSION Single
FREQUENCY 50 Hz	MONOBLOCK No	VOLTAGE (V~) 250 V~
INDICATOR FUNCTION No	NOMINAL VOLTAGE (V~) 250 V~	NUMBER OF WIRES 3

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 15	REMOVAL OF COVER Only with tool	INSTALLATION TYPE Suitable for surface and flush mounting
CLAW Simon 27	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053255834

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.06

PRODUCT NET WEIGHT

0.06

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053003589

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

83

PACKAGING WIDTH

165

PACKAGING LENGTH

221

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3026595

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.585

PACKAGING NET WEIGHT

0.6

PACKAGING WEIGHT UNIT

KGM

