


Plastic tray for adjustable floor box 4 elements for concrete floor installation Simon 500 Cima

REF. 52052102-035

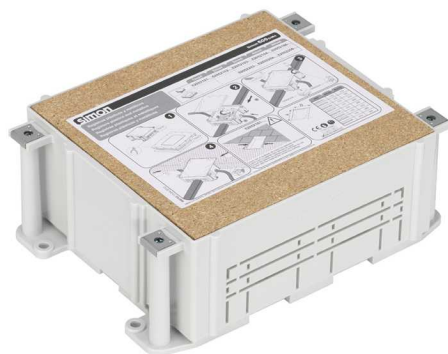

BASIC INFORMATION

DESCRIPTION

For a complete integration into the space, the plastic tray for four elements for adjustable floor box Simon 500 Cima, in a discreet grey tone, it is designed for flush installation in concrete floor. For a complete installation of the product, it must be combined with a for concrete floor box in Grey. The innovation of its materials of manufacture, protecting the flame spread and smoke poison in case of fire, to be made of halogen-free thermoplastic. The Simon 500 Cima plastic tray, it can withstand high temperatures that arrive to reach the most of 90 °C. With a size of 220 x 172 x 80 mm, to its finishes in discreet grey tone and simplicity made innovation, are linked to the elegance of a product that is findings with the concrete floor, guaranteeing the security of your room, maximizing functionality and minimizing the space. The collection Simon 500 Cima in its range of trays for adjustable floor box is perfectly to your office, office or room.

FINISH

Grey

PACKAGING CONTENTS

Tray and protective cover with installation manual

ETIM CLASS

EC000114

MATERIAL

Plastic

REMARKS

To complete the installation of the product, it must be combined with a concrete floor box for 4 elements in a grey (ref.52050002-035) or graphite finish (ref.52050002-038).

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

HEAT RESISTANCE (°C)

+125°C (according rule IEC 60695-10-2)

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

AVAILABLE IN

2, 4, 6, 8 and 12 elements

IK CLASSIFICATION

08

NUMBER OF MODULES

4 modules

DIELECTRIC STRENGTH

No holes or contours, with 2000V at 50 Hz for 1 minute

INSULATION RESISTANCE (V-MΩ)

>5 MOhms at 500V

RECESS DIMENSION (MM)

220 x 172,2 mm

MAX TEMP DURING CONSTRUCTION WORK (°C)

+90 °C

IP RATING

IP4X

NUMBER OF SIDE ENTRANCES

4

KIT AVAILABILITY

No

VERSION

4 elements

INSTALLATION AND MAINTENANCE

NUMBER OF CHANNEL ENTRIES

2

EXTINGUISHING (°C)

+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING

Using screws

INSTALLATION DIRECTION

Horizontal, Vertical

INSTALLATION TYPE

Specially designed for installation in concrete floors

SCREWS REQUIRED FOR SLAB FIXING

Minimum 2 (1 per side, diagonally). It is recommended to fix the bowl with 4 screws for complete fixation.

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053101728

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053101728

PACKAGING VOLUME

3.45

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

DMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

75

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

200

PACKAGING NET WEIGHT

0.74

UNITARY PACKAGING GROSS
WEIGHT

0.74

PACKAGING LENGTH

230

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.74

