
Infrared blinds receiver 700W/VA

REF. **75358-39**

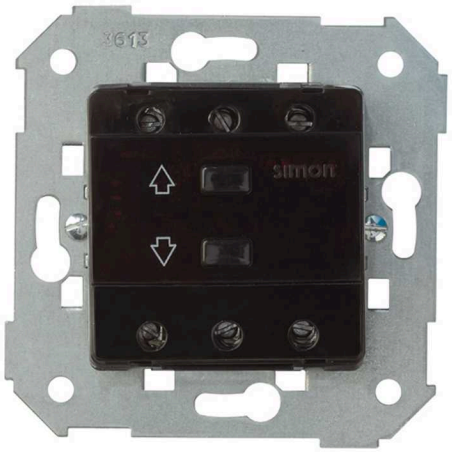

BASIC INFORMATION

DESCRIPTION

Blind infrared receiver 700 W / VA of the Simon 75 Series and that operates with a power of 230 V and which has a type of screw clamping. It works by pulsation and its type is electrical latching. This shutter receiver offers the possibility of centralized control via double reference push-button switch for blinds (75331-39), IR receiver for blinds (7358-39) and / or Simon Vox.2 (81033-39) It supports a cable section of 1.5 to 2.5 mm with a stripped 7 mm, approximately, and is a perfect for receiver installed in rooms with a temperature between 0 and 50ºC. The receiver has been designed according to the regulations UNE -s 60669-2-1: 2005 + A1: 2010 + A12: 2011 and manufactured with metal components with thermoplastic insulation and halogen-free. With this receiver of the Simon 75 series, you will be able to control to perfection your blind.

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 28, Simon 31, Simon 44 Aqua, Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 and Simon 88 frames

PACKAGING CONTENTS

IR blinds receiver and instruction sheet

ETIM CLASS

EC000928

REMARKS

Possibility of centralised control using double push-button switch for blinds (75331-39), IR receiver for blinds(75358-39) and/or Simon Vox.2 (81033-39)

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

NUMBER OF CONTACTS
6

NUMBER OF CONTROLLABLE CIRCUITS
1

NUMBER OF POSSIBLE ELEMENTS
1 element

INDICATOR FUNCTION
No

IP RATING
IP20

LATCH TYPE
Electric

MAXIMUM QUANTITY PER CIRCUIT
No limitation

OPERATING TEMPERATURE RANGE (°C)
0 - 50 °C

POWER SUPPLY (V~)
230 V~

RELAY OUTPUT CURRENT (A)
700 VA

STORAGE TEMPERATURE RANGE (°C)
-20 - 85 °C

VERSION
Single

NUMBER OF WIRES
4

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
6

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal

INSTALLATION TYPE
Suitable for surface and flush mounting

REGULATIONS

REGULATIONS
Dir. 2014/35/UE LVD|Dir. 2014/30/UE EMC|Dir. 2011/65/UE RoHS + post. mod.|EN 60669-2-1:2004|EN 60669-2-1:2004 A1:2009|EN 60669-2-1:2004 A12:2010|EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053058862

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.11

PRODUCT NET WEIGHT
0.11

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053058862

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
57

PACKAGING WIDTH
76

PACKAGING LENGTH
76

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
329232

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.11

PACKAGING NET WEIGHT
0.11

PACKAGING WEIGHT UNIT
KGM