


**Combined two-pole socket (European/American) 16A 250V~
with ground and screw terminal connection ivory Simon 27
Play**

REF. 27439-32

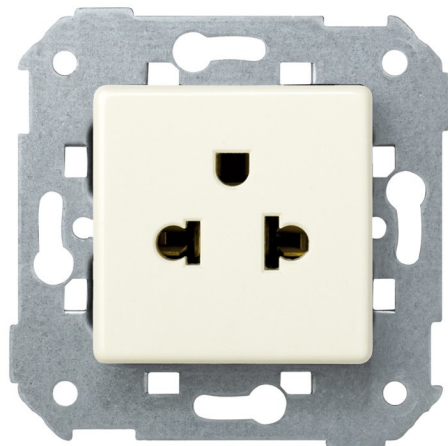

BASIC INFORMATION

DESCRIPTION

In the sockets category of the Simon 27 Play series, we find key mechanisms such as this mixed two-pole socket-outlet (European-American) 16 A 250V~ with ground connection. It is ivory in colour and has dimensions of 45x45 mm, the piece is made up of metal components with halogen-free insulation, providing much more security to individuals. This socket-outlet is suitable for surface and flush mounting and offers a system of screw-terminal connection. Also, it is also valid for replacement or export. The Simon 27 Play collection stands out for its mechanisms focused on the user experience and equipped with all kinds of electronic functions. It is a series that responds to the needs of all households. To maintain this piece, you can use a dry cloth with a soft texture. Avoid abrasive cleaning products containing chlorine.

FINISH

Ivory

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Socket outlet with cover

ETIM CLASS

EC000125

REMARKS

Suitable for replacement or export.

TECHNICAL INFORMATION

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

IP RATING

IP20

NOMINAL VOLTAGE (V~)

125/250 V~

NUMBER OF POSSIBLE ELEMENTS

1 element

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

FORMAT

Two-pole

POWER SUPPLY (V~)

125/250 V~

INDICATOR FUNCTION

No

TYPE OF MECHANISM

Insertion

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

CURRENT (A)

16 A

MONOBLOCK

No

VERSION

Single

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

10

CLAW

Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, American and
Centralisations

INSTALLATION DIRECTION

Horizontal, Vertical

INSTALLATION TYPE

Suitable for surface and flush
mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

REGULATIONS

REGULATIONS

IEC 60884-1:2006 - Ed.3.1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
33

UNITARY PACKAGING WIDTH
45.5

UNITARY PACKAGING LENGTH
45.5

UNITARY PACKAGING
MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0.068

UNITARY PACKAGING VOLUME
UNIT
DMQ

UNITARY PACKAGING GROSS
WEIGHT
0.06

PRODUCT NET WEIGHT
0.04

UNITARY PACKAGING WEIGHT
UNIT
KGM

PACKAGING EAN
7506020300517

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
50

PACKAGING WIDTH
95

PACKAGING LENGTH
225

PACKAGING MEASUREMENT
UNIT
MMT

PACKAGING VOLUME
1.069

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0.6

PACKAGING NET WEIGHT
0.4

PACKAGING WEIGHT UNIT
KGM