Plastic mini tower with 2 sides for 4 elements per side white Simon 500 Cima

REF. **52550204-030**



BASIC INFORMATION

DESCRIPTION

Mini-tower plastic Series of the Simon 500 Cima white in colour, it is a mini-tower of 2 sides and for 4 elements and is suitable for installing on any floor type, whether raised or concrete. This mini-tower has been designed in accordance with the UNE -s 50.085-2-4-: 2006 and made of halogen-free thermoplastic, a material that is totally safe, as it guarantees no flame spread in case of fire and low toxicity level, in case of fire or smoke. You can set directly to the floor using screws, but also offers the option of integration into the floor trunking 85 x 18 mm through the specific baseboard with reference 52554204-030. It is perfect to install it in rooms with temperatures between -5 and 60 ° C, which make it one option, perfect for any type of climatology. To clean it, just use a soft, dry cloth and do not use any kind of a cloth and / or abrasive cleaners containing chlorine.

FINISH

White

MATERIAL

Plastic

COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using an adaptor)

PACKAGING CONTENTS

Mini tower, metal partition wall, fixing studs;ground connection cable, non-slip adhesive foam, screws and installation manual

ETIM CLASS

EC001941

REMARKS

Directly secured to the floor using screws, with the option to integrate into 85x18 mm floor trunking using the specific baseboard ref.52554204-030

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the inclusion of protective foam

AVAILABLE IN
2 sides

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60 °C

ELECTROMAGNETIC IMMUNITY FOR VDM WIRING
Secured by installing the metal partition wall in the housings fitted into the box for this purpose.

HEAT RESISTANCE (°C)
+125°C (according rule IEC 60695-10-2)

IK CLASSIFICATION
08

INSULATION RESISTANCE (V-MΩ)
>5MOhms at 500V

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60 °C

NUMBER OF MODULES
4 per side

RAL
9003

VERSION
2 sides

INSTALLATION AND MAINTENANCE

REMOVAL OF COMPONENTS
Only with tool

EXTINGUISHING (°C)
+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING
Using the screws supplied

REMOVAL OF THE FRAME
Only with tool

INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE
Suitable for installing in any floor type, raised or concrete

SCREWS REQUIRED FOR FLOOR FIXING
4

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + EN 50085-2-4:2009

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053094280

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.64

PRODUCT NET WEIGHT

0.64

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053094280

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

165

PACKAGING WIDTH

130

PACKAGING LENGTH

150

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3217500

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

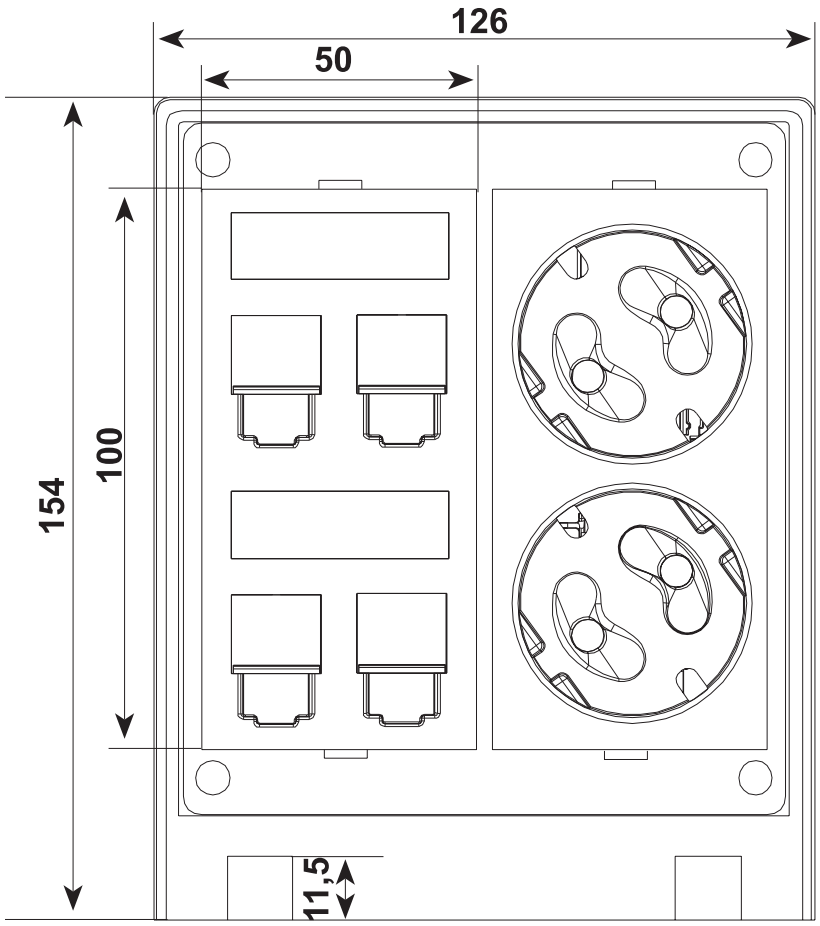
0

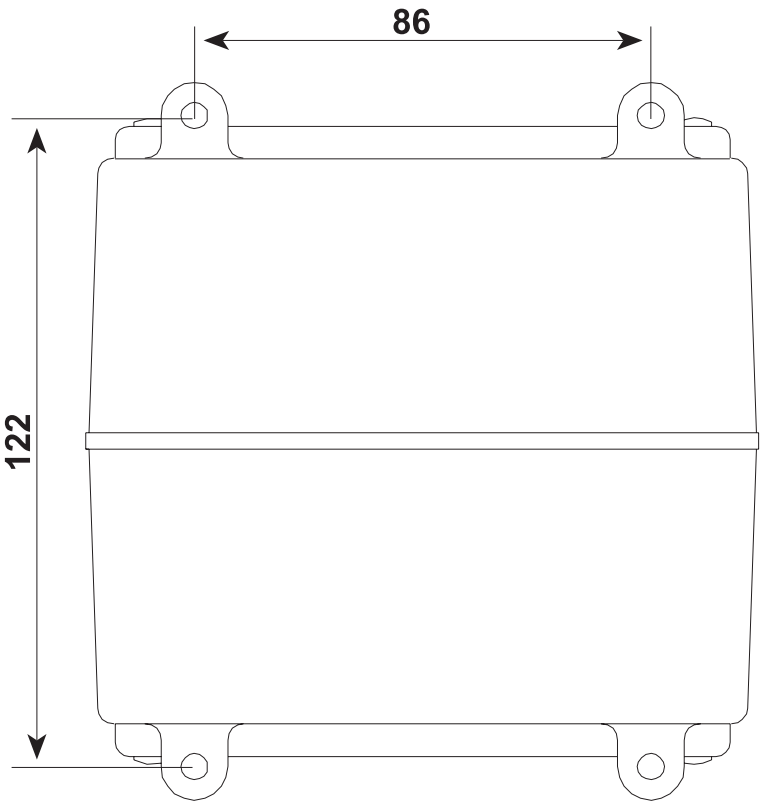
PACKAGING NET WEIGHT

0.64

PACKAGING WEIGHT UNIT

KGM


126
50
154
100
11,5


86
122