


Push button 10 A 250V~ with integrated light indicator and quick terminal connection system Simon 75

REF. 75160-39

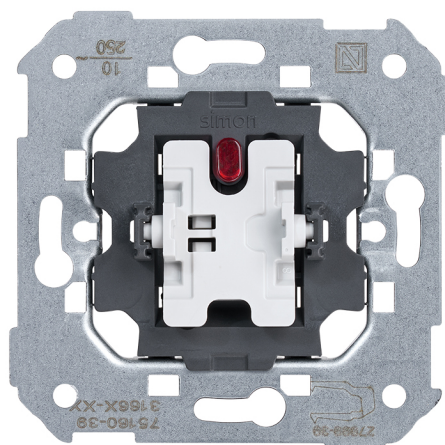

BASIC INFORMATION

DESCRIPTION

Push button with an intensity of 10 A and operates with a power of 250 V~ with an integrated light indicator, and for its installation, it includes a quick terminal connection system. You can find the element in the "control mechanisms" category within the Simon 75 series. To facilitate installation, it is suitable for flush-mounted or surface; choose the option that best fits your needs. Enjoy the multiple color combinations that the Simon 75 series has for you, an endless array of options suitable for any corner of your home. Incorporate the most advanced electronic functions for total control of your home in any part of your house. In addition, in terms of customization options, you can play with both finishes and shapes. Offering the possibility of adopting two different aesthetic shapes thanks to its rectangular trim frame.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept and Simon 82.

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC000029

REMARKS

Can be combined with article 31802-31 if replacing the light indicator.

TECHNICAL INFORMATION

AVAILABLE MARKET CE	INDICATOR FUNCTION Yes	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	CURRENT (A) 10 A	RECESS DIMENSION (MM) 40
CONSUMPTION INDICATOR (mA) 1 mA	IP RATING IP20	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
NUMBER OF CONTACTS 2	LINKABLE No	VERSION Single
NUMBER OF POSSIBLE ELEMENTS 1 element	TYPE OF MECHANISM Pivoting	VOLTAGE (V~) 250 V~
FREQUENCY 50 Hz	MONOBLOCK No	NUMBER OF WIRES 2
	NOMINAL VOLTAGE (V~) 250 V~	

INSTALLATION AND MAINTENANCE

BUS CONNECTION TYPE OF TERMINAL CONNECTION Por inserción	CLAW Simon 27	INSTALLATION TYPE Suitable for surface and flush mounting
CABLE STRIPPING NECESSARY (MM) 15	REMOVAL OF COVER Only with tool	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Fast
	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053255827

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.06

PRODUCT NET WEIGHT

0.06

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053003572

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

83

PACKAGING WIDTH

165

PACKAGING LENGTH

221

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3026595

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.6

PACKAGING NET WEIGHT

0.6

PACKAGING WEIGHT UNIT

KGM

