

Spotlight 615 rail 2700 K Spot white

REF. 61500030-282



BASIC INFORMATION

APPLICATION

Accent lighting

PACKAGING CONTENTS

1 unit

ETIM CLASS

EC001744

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

CRI

90

LUMENS (LM)

1700 lm

IP RATING

IP20

DIRECTIONAL

Yes

LUMENS/W

1700lm/ 23W

OPERATING TEMPERATURE RANGE (°C)

35 °C maximum

DRIVER INCLUDED

Yes

OPTICS

Spot

POWER SUPPLY (V~)

230 V~

L70 (°C)

100,000 h at 25 °C

PHOTOBIOLOGICAL CLASSIFICATION

Exempt category

COLOR TEMPERATURE (K)

2700 K

L90 (°C)

50,000 h at 25 °C

POWER (W)

23 W

CONTROL

On/Off


LIGHTING EFFICIENCY (LM/W)

73,9 lm/W


CHROMATICS CRI ICONS

CRI
90

PHOTOMETRY ASSETS – CONICAL

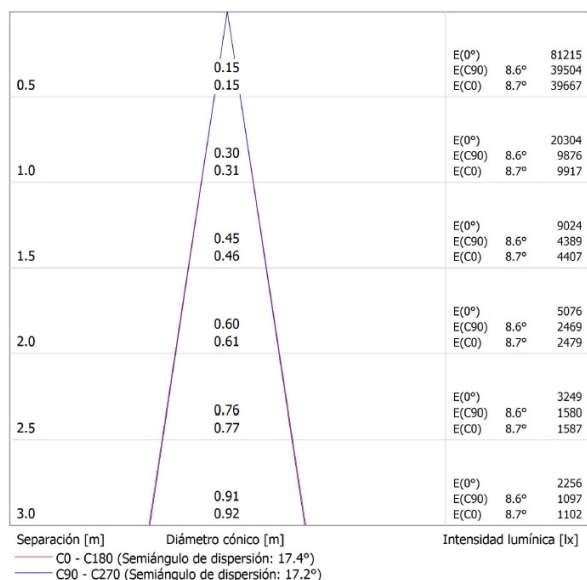

PHOTOMETRY ASSETS – POLAR

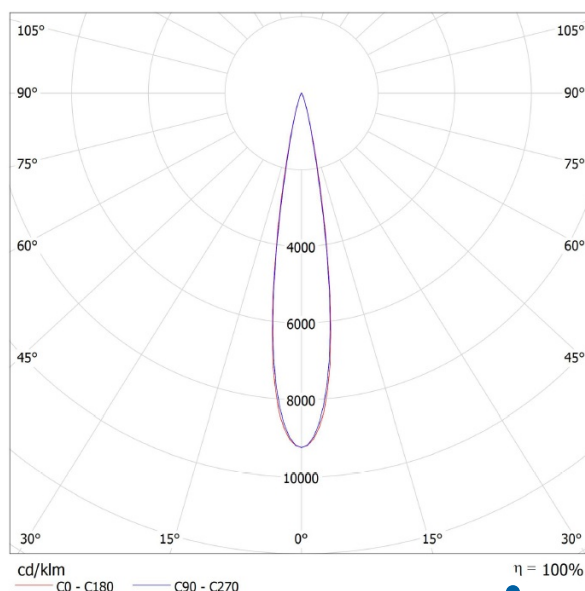

INSTALLATION AND MAINTENANCE

INSTALLATION TYPE

3-phase adjustable rail

REGULATIONS

WARRANTY

5 years

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053198551

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.846

PRODUCT NET WEIGHT

0.635

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053198551

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

84

PACKAGING WIDTH

177

PACKAGING LENGTH

296

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

4400928

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.846

PACKAGING NET WEIGHT

0.635

PACKAGING WEIGHT UNIT

KGM