Metal mini tower kit with 4 heights and 1 side with 1 double socket, 2 dual UPS and 2 plates for 2 RJ45 graphite Simon 500 Cima

REF. **52516401-036**



BASIC INFORMATION

DESCRIPTION

Kit for metal mini-tower 4 heights and one side with a double socket, 2 double UPS) and 2 plates for 2 RJ45 Keystone I, Keystone II and Systimax. This mini-tower in graphite colour belonging to the Simon 500 Cima series and has dimensions of 298,5 x 221 x 68 mm depth. Manufactured in stainless steel, has a current of 16 A and a voltage of 250V. It has a click terminal system and works by insertion, although it does not include RJ45 connectors. The centre frames include linkable parts that form blocks, separating the electrical part from the voice and data part, making it easy maintenance. It supports a cable section of 1.5 to 2.5 mm and is suitable for installing on any floor type, whether in Floor and floors. It has been designed according to the UNE -s 50.085-1: 2006 and works at temperatures between -5 and 120 ° C.

FINISH

Metal

MATERIAL

Stainless steel

PACKAGING CONTENTS

Configured mini tower, metal partition wall, ground connection cable, screws and installation manual

ETIM CLASS

EC001941

REMARKS

The frame holders include linkable parts that form blocks, allowing the electrical part to be separated from the voice and data part for ease of maintenance

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the inclusion of protective foam

AVAILABLE IN
1 side

NUMBER OF CONNECTIONS PER TERMINAL
1 terminal connection for click terminal connection system and 2 terminal connections for screw terminal connection system

COMPATIBLE WITH CONNECTORS
Simon©, AMP netconnect© Standard 110, SL110, SL Tool-less, 216000 and 216005, Brand-Rex©, ADC Krone© KM8 Keystone, BeldenCDT© Giga Flex Keystone, Ersys©, General Cable©, Molex©, Panduit© Netkey, Ortronics© Clarity TechChoice Keystone, Rit© and other manufacturers with Keystone snap-fit system.

NUMBER OF CONNECTORS
4

RJ45 CONNECTORS
Not included

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60 °C

DUST SHUTTER
Yes

ELECTROMAGNETIC IMMUNITY FOR VDM WIRING
Secured by installing the metal partition wall in the housings fitted into the box for this purpose.

FORMAT
Schuko

IK CLASSIFICATION
08

INDICATOR FUNCTION
Yes

CURRENT (A)
16 A

IP RATING
IP4X

LED CONSUMPTION INDICATOR (MA)
0.55

LINKABLE
Yes, using accessory included 50000996-039

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 120° C

TYPE OF MECHANISM
Insertion

NUMBER OF MODULES
8

NUMBER OF PLATES
2 voice and data plates

PLATE TYPE
Flat

RJ45 ADAPTOR MODULE
Included in voice and data plates

SNAP-FIT RJ45 PLATES
Keystone I, Keystone II and Systimax

SNAP-FIT TYPE
Keystone I, Keystone II and Systimax

NUMBER OF SOCKETS
1 double socket for standard current circuit and 2 double sockets for stable current circuits

VERSION
1 side

INSTALLATION AND MAINTENANCE

REMOVAL OF COMPONENTS
Only with tool

REMOVAL OF COVER
Only with tool

TYPE OF FASTENING
Using the screws supplied

REMOVAL OF THE FRAME
Only with tool

INSTALLATION DIRECTION
Vertical

INSTALLATION TYPE
Suitable for installing in any floor type, raised or concrete

REMOVAL OF THE PLATE
Only with tool

SCREWS REQUIRED FOR FLOOR FIXING
4

REMOVAL OF THE SOCKET
Only with tool

TYPE OF TERMINAL CONNECTION - FUNCTION 1
1 click connection (1 click®)

NUMBER OF TERMINALS
3 inputs and 3 outputs

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50085-2-4:2009 + EN 50173-1:2011 + EN 50581:2012 + IEC 60884-1 Ed 3.2

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053100837

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
2.281

PRODUCT NET WEIGHT
2.281

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053100837

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
67

PACKAGING WIDTH
168

PACKAGING LENGTH
398

PACKAGING MEASUREMENT UNIT
MMT

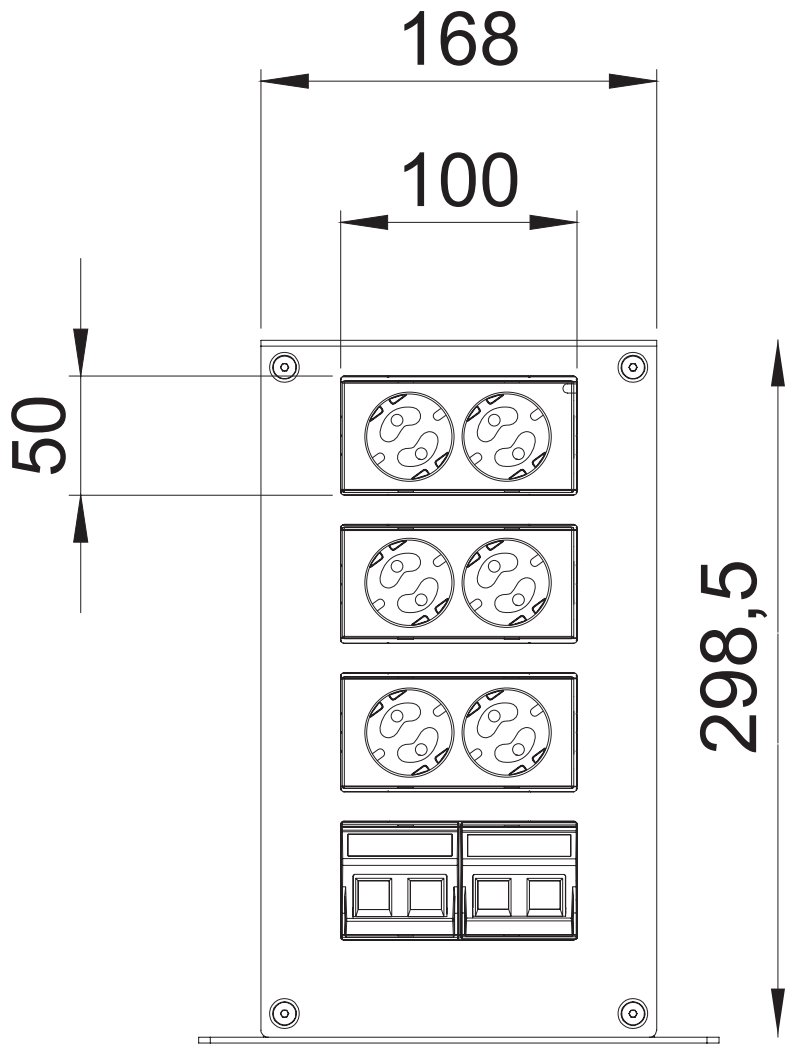
PACKAGING VOLUME
4.48

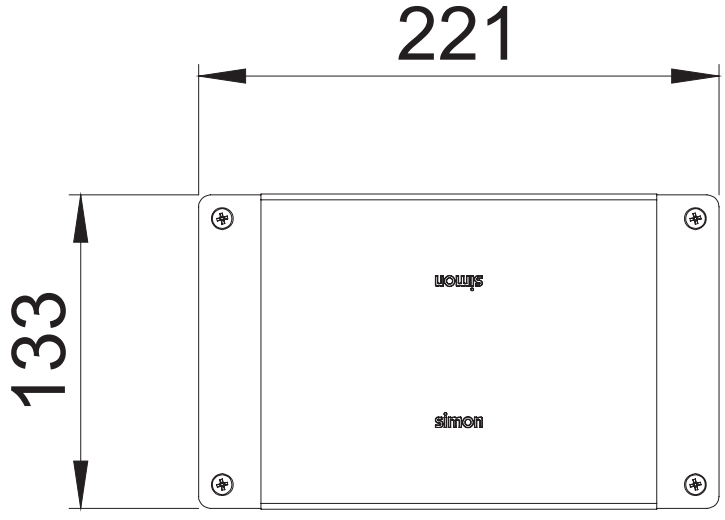
PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
2.281

PACKAGING WEIGHT UNIT
KGM


168
100
50
298,5


221
133
simon
simon