


Voice and data flat plate for 1 element without dust cover for 1 Infra+® RJ45 connector white Simon K45

REF. K075/9

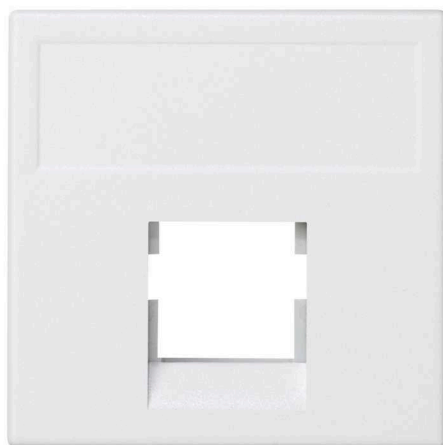

BASIC INFORMATION

DESCRIPTION

This is the flat data and voice plate, in a beautiful and versatile finished in white colour, series Simon K45. It has no dust shutter and is an element for an RJ45 connector, Infra +. In total is available for both one as for two RJ45 connectors. This one, in particular, is the individual version, half an element. To combine this plate of voice and data Simon in vertical enclosures (Teleblock, columns, etc.), it is necessary to 90 ° positioner resorting to the reference (: K66). In this way it is possible to guide the plate in vertical. Its exact dimensions are 45 x 45 millimetres and 8.5 millimetres of depth. The manufacturing materials of this plate Simon K45 are thermoplastic components, insulation, which prevent the propagation of the flame in case of fire. Also, to minimize the toxicity if there is smoke. It should be pointed out that it can be installed both on the surface-mounted and flush mounted. For proper maintenance, you just need to clean the plate with a soft cotton, very soft and completely dry cloth.

FINISH

White

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-030)

PACKAGING CONTENTS

Flat voice and data plate without dust cover

ETIM CLASS

EC000018

REMARKS

When combining the voice and data plate in vertical housings (mini columns, columns, Teleblock, channels, mechanism holders, etc.) you must use the 90° positioner (ref. K66) to guide the plate into a vertical position.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

COMPATIBLE WITH CONNECTORS

Infra+® RJ45 connectors.

RJ45 CONNECTORS

Not included in voice and data plate

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60° C

DUST PROTECTION

No

FORMAT

RJ45

IP RATING

IP20

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60° C

NUMBER OF MODULES

Half

PLATE TYPE

Flat

RAL

9003

RJ45 ADAPTOR MODULE

Included in voice and data plate

SNAP-FIT RJ45 PLATES

Infra+® RJ45 connectors

SNAP-FIT TYPE

Infra+® RJ45 connectors

VERSION

Single

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-030)

INSTALLATION DIRECTION

Vertical according to the direction of the mechanisms

INSTALLATION TYPE

Suitable for surface and flush mounting

REMOVAL OF THE PLATE

Only with tool

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.013

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING VOLUME

911400

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8426436025134

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

0.3

UNITS CONTAINED PACKAGING

20

PACKAGING GROSS WEIGHT

0.22

UNITARY PACKAGING VOLUME
UNIT

MMQ

PACKAGING HEIGHT

70

PACKAGING NET WEIGHT

0.26

UNITARY PACKAGING GROSS
WEIGHT

0.013

PACKAGING WIDTH

93

PACKAGING WEIGHT UNIT

KGM

PACKAGING LENGTH

140