

Double-pole switch 16AX 250V~ for half element with pilot light and screw terminal connection system white Simon 27 Play

REF. 27134-64



BASIC INFORMATION

DESCRIPTION

It is a double-pole switch 16AX 250V ~, half element, with pilot light that is included in the Simon 27 Play series, finished in white, this article, measures 22.5x45 mm and has been manufactured in compliance with the regulation. It consists of metal components with insulation in halogen-free thermoplastic material and trim made of thermoset plastic. The switch is suitable for surface or flush mounting installation. Offers screw terminal connection system, a formula quick and easy for the user, is compatible with the frames of the series Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralizations and Simon 44 Aqua. For proper maintenance, the ideal is to clean this mechanism with a soft and dry cloth. Also, it is recommended to avoid the use of abrasive cleaning products containing chlorine, as they could damage the switch.

FINISH

White

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Mechanism with rocker

ETIM CLASS

EC001590

TECHNICAL INFORMATION

AVAILABLE MARKET CE	CURRENT (A) 16 AX	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	IP RATING IP20	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
CONSUMPTION INDICATOR (mA) 0.55 mA	MAINTENANCE Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.	VERSION Single
NUMBER OF POSSIBLE ELEMENTS Half element	TYPE OF MECHANISM Pivoting	VOLTAGE (V~) 250 V~
INDICATOR FUNCTION Yes		

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 11	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal, American, Small spaces and Centralisations	INSTALLATION TYPE Suitable for surface and flush mounting
CLAW Simon 27	INSTALLATION DIRECTION Horizontal, Vertical	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.035

PACKAGING MEASUREMENT

UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT

UNIT

KGM

PACKAGING VOLUME

0.012

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8421053075579

PACKAGING VOLUME UNIT

HLT

UNITARY PACKAGING VOLUME

365040

UNITS CONTAINED PACKAGING

5

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING VOLUME

UNIT

MMQ

PACKAGING HEIGHT

54

PACKAGING NET WEIGHT

0.175

UNITARY PACKAGING GROSS

WEIGHT

0.035

PACKAGING WIDTH

52

PACKAGING WEIGHT UNIT


KGM

PACKAGING LENGTH


130

MECANISMOS SIMON 27, 28 Y 44


Mecanismos básicos / Basic switches




Interrupor unipolar / Single-pole switch
XX00101-XX




Pulsador / Push button switch
XX00150-XX



Interrupor bipolar / Double pole switch
XX00133-XX




Conmutador / 2-way switch
XX00201-XX

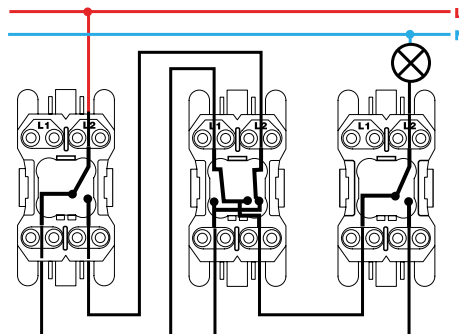


Conmutador cruce / Intermediate switch
XX00251-XX


Mecanismos con piloto / Pilot switches




Interrupor unipolar / Single-pole switch
XX00102-XX




Interrupor bipolar / Double pole switch
XX00134-XX

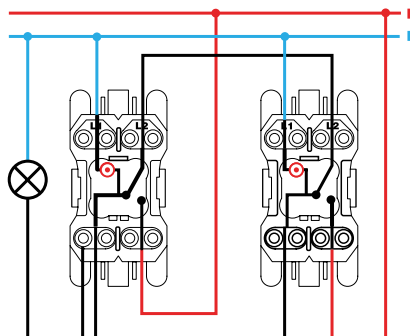


Conmutador / 2-way switch
XX00202-XX




Interrupor unipolar / Single-pole switch
XX00104-XX



Pulsador / Push button switch
XX00160-XX



Conmutador / 2-way switch
XX2700204-XX

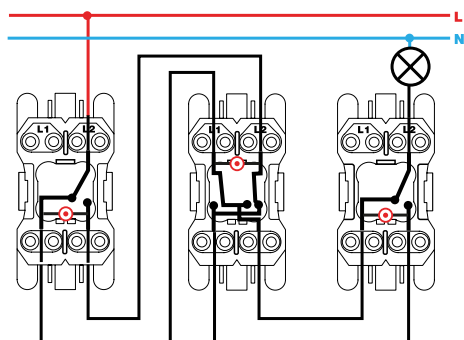

Conmutador cruce / Intermediate switch
XX2700254-XX