


Flat voice and data plate with dust cover for 1 element with 2 category 5e UTP RJ45 white Simon 500 Cima

REF. 50004189-030

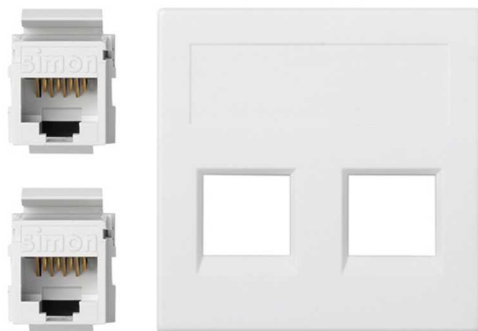

BASIC INFORMATION

DESCRIPTION

Protect electrical systems installed in private homes, commercial premises and the headquarters of companies will avoid the oxidation of the same at high temperature and humidity. A good ally to avoid these problems is the Plate for voice and data plate without dust cover for an element with two RJ45 category 5e UTP in colour white included in the catalogue of the Simon 500 Cima series, an element that includes clips for fastening in vertical and horizontal enclosures without the need for an adaptor. Its features include: Dimensions of 50 x 50 x 32.5 mm, cabling 22-26 AWG and two RJ45 connectors with snap-fit basic Keystone I, II, ATT / Avaya. This plate has been designed with metal components with self-extinguishing and halogen-free thermoplastic insulation., a material that guarantees no flame propagation in case of fire and the low toxicity in case of smoke all with the best value for money.

FINISH

White

PACKAGING CONTENTS

Flat voice and data plate without dust cover, 2 category 5e UTP RJ45 and installation manual

ETIM CLASS

EC000018

COMPATIBILITY

Simon 500 Cima enclosures

REMARKS

The plate is snap-fitted for mounting in vertical and horizontal enclosures without the need for an adaptor.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

DUST PROTECTION

No

NUMBER OF MODULES

1

CABLE SECTION ADMITTED (MM)

22-26 AWG wiring

DUST SHUTTER

No

PLATE TYPE

Flat

AVAILABLE IN

Plate for 1 and 2 RJ45

FORMAT

RJ45

RAL

9003

RJ45 CONNECTION

With insertion tool

IP RATING

IP20

RJ45 ADAPTOR MODULE

Included in voice and data plate

CONNECTOR CHARACTERISTICS

Category 5e UTP

KIT AVAILABILITY

No

SNAP-FIT RJ45 PLATES

Keystone I, II, ATT®/Avaya®

NUMBER OF CONNECTORS

2

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

SNAP-FIT TYPE

Keystone I, II, ATT®/Avaya®

RJ45 CONNECTORS

Included in voice and data plate

VERSION

Single

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60 °C

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

INSTALLATION AND MAINTENANCE

REMOVAL OF CONNECTOR

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Specific Simon 500 Cima

INSTALLATION DIRECTION

Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE

Fixing by direct snap-fit, no tools needed.

REMOVAL OF THE PLATE

Only with tool

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING WIDTH

0

PACKAGING EAN

8421053098103

PACKAGING VOLUME

0.052

UNITARY PACKAGING LENGTH

0

UNITS CONTAINED PACKAGING

20

PACKAGING VOLUME UNIT

HLT

UNITARY PACKAGING VOLUME

0

PACKAGING HEIGHT

80

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING GROSS
WEIGHT

0.076

PACKAGING WIDTH

224

PACKAGING NET WEIGHT

1.52

PRODUCT NET WEIGHT

0.076

PACKAGING LENGTH

290

PACKAGING WEIGHT UNIT

KGM

