


Voice and data flat plate without dust cover for 1 element for 2 3M® RJ45 connectors black Simon K45

REF. KB045/14

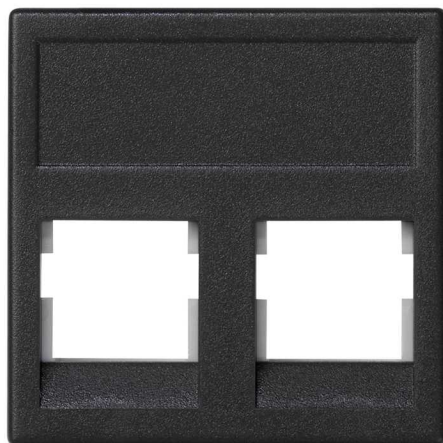

BASIC INFORMATION

DESCRIPTION

This flat base plate of voice and data consists of 1 element for 2 connectors RJ45 from 3M ®. Does not include dust shutter and is finished in black colour, measuring 45x45 mm and a depth of 8.5 mm, it is in the series Simon K45. Its manufacturing material is halogen-free thermoplastic, which guarantees that the fire is not propagate in the case of a notional fire, and low toxicity if any smoke. The piece complies with the regulation and is designed for both surface and flush mounting. In this type of articles, maintenance is very important. It is ideal to clean the plate with a soft, dry cloth and avoid abrasive cleaners containing chlorine. The collection Simon K45 lands with the aim of improve the workplace solutions of the spaces through functional mechanisms and adapted to the current needs.

FINISH

Black

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-038)

PACKAGING CONTENTS

Flat voice and data plate without dust cover

ETIM CLASS

EC000018

REMARKS

When combining the voice and data plate in vertical housings (mini columns, columns, Teleblock, channels, mechanism holders, etc.) you must use the 90° positioner (ref. K66) to guide the plate into a vertical position.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

DUST SHUTTER

No

NUMBER OF MODULES

Half

AVAILABLE IN

Plate for 1 and 2 RJ45 connectors

FORMAT

RJ45

PLATE TYPE

Flat

COMPATIBLE WITH CONNECTORS

Volition OCK®, RJ45, K5e and K6 from 3M®.

IP RATING

IP20

RAL

7021

KIT AVAILABILITY

No

RJ45 ADAPTOR MODULE

Included in voice and data plate

RJ45 CONNECTORS

Not included in voice and data plate

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

SNAP-FIT RJ45 PLATES

3M® RJ45 connectors

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60° C

SNAP-FIT TYPE

3M® RJ45 connectors

DUST PROTECTION

No

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60° C

VERSION

Single

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-038)

INSTALLATION DIRECTION

Vertical according to the direction of the mechanisms

INSTALLATION TYPE

Suitable for surface and flush mounting

REMOVAL OF THE PLATE

Only with tool

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.013

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING VOLUME

911400

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8426436040052

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

0.3

UNITS CONTAINED PACKAGING

20

PACKAGING GROSS WEIGHT

0.28

UNITARY PACKAGING VOLUME UNIT

MMQ

PACKAGING HEIGHT

70

PACKAGING NET WEIGHT

0.26

UNITARY PACKAGING GROSS WEIGHT

0.013

PACKAGING WIDTH

93

PACKAGING WEIGHT UNIT

KGM

PACKAGING LENGTH

140