

ARCH Downlight Flush-mounted Round 3000 K Wide Flood 1-10 V Black

REF. 91551003-388



BASIC INFORMATION

FINISH

Black

APPLICATION

Domestic, Office, Retail, Hotel, Contract

PACKAGING DIMENSIONS (MM)

16x224x171 mm

BODY MATERIAL

Die-cast aluminium

PACKAGING CONTENTS

1 Unit

ETIM CLASS

EC001744

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

DIRECTIONAL

Yes

LUMENS (LM)

600 lm

IP RATING

IP43

DRIVER INCLUDED

Yes

NUMBER OF LUMINAIRES

1

OPERATING TEMPERATURE RANGE (°C)

0 - 35 °C

ELECTRICAL CLASS

II

MACADAM STEPS

<3 Step MacAdam

POWER SUPPLY (V~)

220/240 V~

ENERGY EFFICIENCY

A+

OPTICS

Wide Flood 60°

RAL

9005

L70 (°C)

100000h at 25°C

PHOTOBIOLOGICAL CLASSIFICATION

Class II

COLOR TEMPERATURE (K)

3000 K

L90 (°C)

30000h at 25°C

POWER FACTOR (Φ)

> 0,55

CONTROL

1-10 V, Push Dim

COLOR TYPE

NW

POWER (W)

9 W


CRI

90

LIGHTING EFFICIENCY (LM/W)

111 lm/W

PHOTOMETRY ASSETS - POLAR

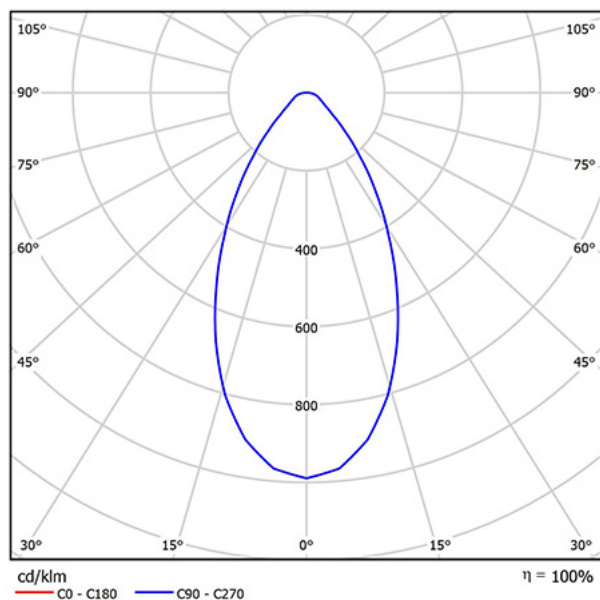

INSTALLATION AND MAINTENANCE

INSTALLATION ALTERNATIVES

Surface-mounted, Trimless

INSTALLATION TYPE

Flush-mounted

REGULATIONS

EAC MARKED

Yes

ECORRAE MARKED

Yes

WARRANTY

5 years

LOGISTICS INFORMATION

UNITARY EAN CODE

8436547035090

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.9

PRODUCT NET WEIGHT

0.719

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8436547035090

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

116

PACKAGING WIDTH

171

PACKAGING LENGTH

224

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

4528125

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.99

PACKAGING NET WEIGHT

0.719

PACKAGING WEIGHT UNIT

KGM