


Group of 2 push buttons for shutters 10 A 250V~ with interlocking system Simon 75

REF. 75331-39

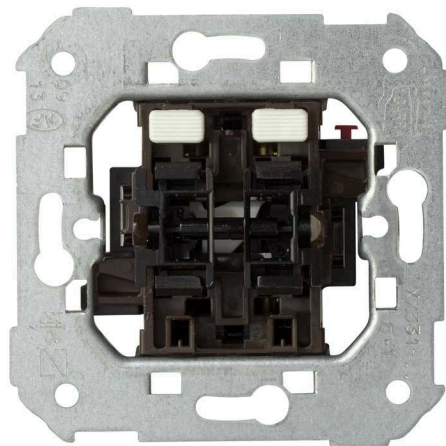

BASIC INFORMATION

DESCRIPTION

With the group of 2 push buttons for controlling shutters from the Simon 75 collection, you will achieve the most appropriate finishes for the space thanks to its wide range of color combinations, combined with the functionalities and the technological innovation characteristic of Simon. Composed of isolated metallic materials with halogen-free thermoplastic, it provides safety in the room in case of fire, able to withstand maximum temperatures from -25 to 50 °C. With an accepted cable section of 1.5 to 2.5 mm and stripping of 11 mm, the group of 2 push buttons Simon 75 is suitable for flush-mounted or surface installation, expanding the aesthetic and functional possibilities of the specific space. In addition, it is compatible with a power supply voltage of 250 Volts and 10 Amperes of current with modular width (10:00 AM) and can be combined with the mechanisms of the Simon 77 range for a quick and convenient installation. Simon 75 has equipped this group of 2 push buttons with safety interlocking that prevents simultaneous actuation.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept and Simon 82.

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC000044

REMARKS

Mechanism fitted with security latching to prevent simultaneous operation.

TECHNICAL INFORMATION

AVAILABLE MARKET CE	IP RATING IP20	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	LATCH TYPE Mechanical	VERSION Double
NUMBER OF CONTACTS 5	LINKABLE No	VOLTAGE (V~) 250 V~
NUMBER OF POSSIBLE ELEMENTS 1 element	TYPE OF MECHANISM Pivoting	NUMBER OF WIRES 5
INDICATOR FUNCTION No	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C	
CURRENT (A) 10 A	RECESS DIMENSION (MM) 35	

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 11	REMOVAL OF COVER Only with tool	INSTALLATION TYPE Suitable for surface and flush mounting
CLAW Simon 27	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053255964

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.068

PRODUCT NET WEIGHT

0.068

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053003961

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

82

PACKAGING WIDTH

165

PACKAGING LENGTH

223

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3026595

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.68

PACKAGING NET WEIGHT

0.68

PACKAGING WEIGHT UNIT

KGM

