


12V power supply for flush-mount detectors with LED service indicator white

REF. 75870-30

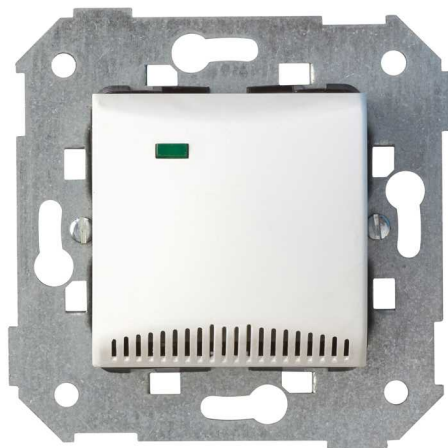

BASIC INFORMATION

DESCRIPTION

This flood detector is a product of the Simon 75 series, Simon has equipped to this detector with led indicator of status service. The flood detector is presented in a classic colour white, so that its integration is any place where it is is very simple. It is designed to be installed by recessed or directly in surface-mounted and the product includes the claws for its installation. Its operation system is by probe. It is suitable for a current of 230 volts and requires a power supply, that can be found in the range of Simon products with reference number 75870-30. The metal components with halogen-free thermoplastic insulation with which it is made this detector, guarantee optimum operation over time, in addition, these materials give added strength to the product and a hardness extra that makes it possible to withstand external harmful actions and knocks or scratches.

FINISH

White

COMPATIBILITY

Frames Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations, Simon 28, Simon 31, Simon 44 Aqua, Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 and Simon 88

PACKAGING CONTENTS

Power supply 12V and instruction sheet

ETIM CLASS

EC002540

REMARKS

A power supply must be used per technical detector.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

NUMBER OF POSSIBLE ELEMENTS

1 element

OPERATING TEMPERATURE RANGE (°C)

0 - 40 °C

ACOUSTIC FUNCTION

No

FREQUENCY

50 Hz

POWER SUPPLY (V~)

230 V~

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

INDICATOR FUNCTION

Yes

STORAGE TEMPERATURE RANGE (°C)

-20 - 75 °C

NUMBER OF CONTACTS

4

IP RATING

IP20

VERSION

Single

NUMBER OF CONTROLLABLE CIRCUITS

1

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

NUMBER OF WIRES

2

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

CLAW

Included

INSTALLATION TYPE

Suitable for surface and flush mounting

REGULATIONS

REGULATIONS

UNE-EN 61000-6-3:2007 + A1:2012

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
329232

UNITARY PACKAGING VOLUME
UNIT
MMQ

UNITARY PACKAGING GROSS
WEIGHT
0.175

PRODUCT NET WEIGHT
0.175

UNITARY PACKAGING WEIGHT
UNIT
KGM

PACKAGING EAN
8421053058466

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
57

PACKAGING WIDTH
76

PACKAGING LENGTH
76

PACKAGING MEASUREMENT
UNIT
MMT

PACKAGING VOLUME
329232

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.175

PACKAGING NET WEIGHT
0.175

PACKAGING WEIGHT UNIT
KGM