


Front kit for 2 elements with 1 dimmer rocker, 1 USB charger and 1 German socket outlet gloss white Simon 100

REF. 10020209-130

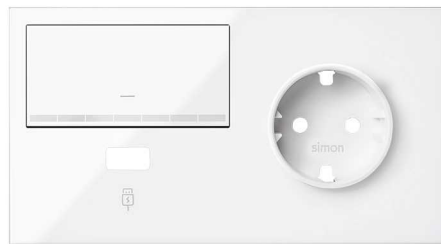

BASIC INFORMATION

DESCRIPTION

This is a white Simon 100 kit for 2 elements with 1 adjustable key, 1 USB charger and 1 Schuko plug base is made in white and has a glossy finish. It is compatible with all products of the Simon series. It has a type of 1-click emborning and the type of activation is carried out by insertion.

As regards the type of installation, it is a product that can be placed both horizontally and vertically. To perform a correct maintenance of the device, it must be preserved in a temperature range that ranges between 5 to 40° C for proper operation and a temperature range of -25 to 50° C for storage. For cleaning, simply use a soft cloth slightly dampened in soapy water and avoid abrasive cleaners containing chlorine.

It is a product that has been made based on regulations 2014/35 / UE LVD + directive 2014/30 / UE EMC + directive 2011/65 / UE RoHS + EN 50581: 2012 + EN 60669-2-1: 2004 + EN 60669-2-1: 2004 A1: 2009 + EN 60669-2-1: 2004 A12: 2010 * 6 + EN 60950-1: 2006 + EN 60950-1: 2006 A11: 2009 + EN 60950-1: 2006 A1: 2010 + EN 60950-1: 2006 A12: 2011 + EN 60950-1: 2006 A2: 2011 * 3 + ETSI-EN 301489-34 v14.1 * 3 + IEC 60884-1 Ed. 3.2 * 1.

FINISH

Gloss white

COMPATIBILITY

Mechanisms Kit Simon 100

MATERIAL

Thermoplastic

ETIM CLASS

EC000007

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

IP RATING

IP20

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

NUMBER OF POSSIBLE ELEMENTS

2 elements

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

FORMAT

Schuko,USB

MONOBLOCK

Yes

VERSION

2 elements

INDICATOR FUNCTION

Yes

INSTALLATION AND MAINTENANCE

INSTALLATION DIRECTION

Vertical and horizontal

INSTALLATION TYPE

Suitable for flush mounting

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2014/30/UE EMC + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60669-2-1:2004 + EN 60669-2-1:2004 A1:2009 + EN 60669-2-1:2004 A12:2010*6 + EN 60950-1:2006 + EN 60950-1:2006 A11:2009 + EN 60950-1:2006 A1:2010 + EN 60950-1:2006 A12:2011 + EN 60950-1:2006 A2:2011*3 + ETSI-EN 301489-34 v14.1*3 + IEC 60884-1 Ed. 3.2*1

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053147580

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.098

PRODUCT NET WEIGHT

0.098

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053147580

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

25.3

PACKAGING WIDTH

155

PACKAGING LENGTH

84

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

329406

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

98

PACKAGING NET WEIGHT

0.098

PACKAGING WEIGHT UNIT

GRM