2-way switch 10AX 250V~ for half element with fast terminal connection system grey Simon 27 Play

REF. **27201-66**



BASIC INFORMATION

DESCRIPTION

2-way switch 10 AX 250V~ with half element and grey finish. The piece measures 22.5x45 mm and is made up of metal elements with thermoplastic insulation. The coating, in fact, does not contain halogens, so it offers greater security to users. The trim is made of thermostable plastic. It has an efficient and fast terminal connection system, making installation as easy as possible. The user has the possibility of replacing the finish of the supplied rocker. There are 5 additional finishes available for this purpose. It is a 2-way switch that complies with the regulations and is also suitable for surface and flush mounting. It has been designed to withstand extreme temperatures, although it is preferable to install it in environments between 5 and 40°. It is part of the Simon 27 Play series, an innovative and revolutionary collection offering solutions adapted to all lifestyles.

FINISH

Grey

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Mechanism with rocker

ETIM CLASS

EC001590

REMARKS

Possibility of substituting the finish of the rocker supplied with a different one. 5 additional finishes available.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

NUMBER OF POSSIBLE ELEMENTS

Half element

INDICATOR FUNCTION

No

CURRENT (A)

10 AX

IP RATING

IP21

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM

Pivoting

NOMINAL VOLTAGE (V~)

250 V~

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

VERSION

Single

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
11

CLAW
Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal, American, Small spaces and Centralisations

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Fast

REGULATIONS

REGULATIONS
Dir. 2014/35/UE LVD|Dir. 2011/65/UE RoHS + post. mod.|EN 60669-1:2018|EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053251782

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
1229865

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.024

PRODUCT NET WEIGHT
0.024

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053071427

UNITS CONTAINED PACKAGING
20

PACKAGING HEIGHT
53

PACKAGING WIDTH
105

PACKAGING LENGTH
221

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
0.604

PACKAGING VOLUME UNIT
DMQ


PACKAGING GROSS WEIGHT
0.475

PACKAGING NET WEIGHT
0.48


PACKAGING WEIGHT UNIT
KGM

MECANISMOS SIMON 27, 28 Y 44


Mecanismos básicos / Basic switches




Interruptor unipolar / Single-pole switch
XX00101-XX




Pulsador / Push button switch
XX00150-XX



Interruptor bipolar / Double pole switch
XX00133-XX




Conmutador / 2-way switch
XX00201-XX

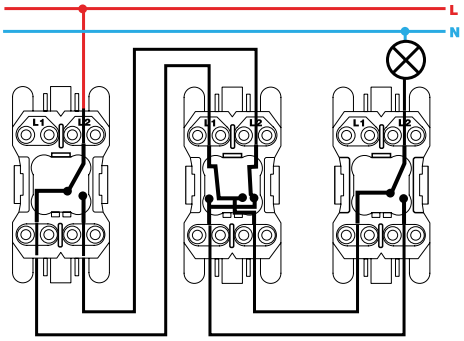


Conmutador cruce / Intermediate switch
XX00251-XX


Mecanismos con piloto / Pilot switches



Interruptor unipolar / Single-pole switch
XX00102-XX




Interruptor bipolar / Double pole switch
XX00134-XX

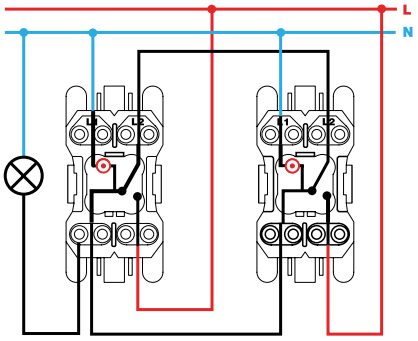


Conmutador / 2-way switch
XX00202-XX


Mecanismos con luminoso / Switches with light




Interruptor unipolar / Single-pole switch
XX00104-XX



Pulsador / Push button switch
XX00160-XX



Conmutador / 2-way switch
XX2700204-XX

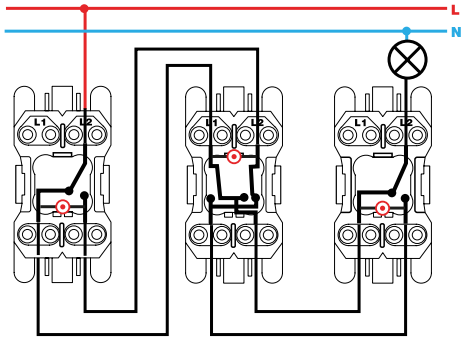

Conmutador cruce / Intermediate switch
XX2700254-XX