


**Mechanism-holder unit IP66 with manual lock and Italian
socket P40 socket outlet with 1 RJ45 category 5e UTP brass
Simon K45**

REF. KSE35U/23/71

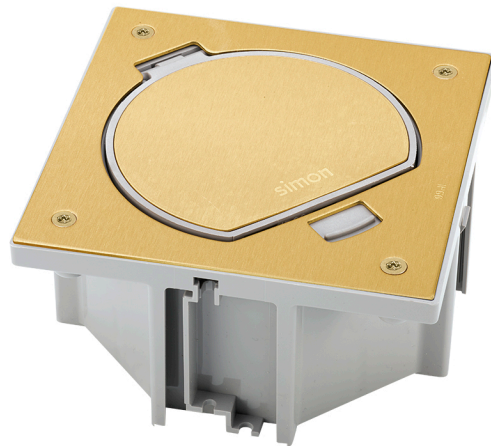

BASIC INFORMATION

DESCRIPTION

The mechanism-holder unit of the range Simon K45 range with manual closure and Italian P40 socket outlet with an RJ45 connector of category 5e. Supports the connection of an element of 16 up to 16 A of current and 250 volts. With these elements, the unit is designed to be installed quickly and very easily by insertion screw. The product is packaged in colour brass and can be installed in suspended floors or raised floor and concrete. In the case of installing it in concrete floor, you will need to also a specific tray for this type of floor (Ref. KGE1709), and in the case of the raised floor will be with its corresponding tray (ref. KGE170TF). The unit has dimensions of 130 x 130 millimetres and 55 millimetres of depth, and supports a cable section that is from 1.5 to 2.5 millimetres. The cover has a system reinforcing using anchor points that protecting the connections is used as long as its use of the possible damage due to the passage of personnel. The material used for its manufacture is metal and the unit is maintained on a thermoplastic baseboard, with all the advantages that this material provides as its self-extinguishing capacity in case of fire, and the minimization of toxic fumes.

FINISH

Brass

MATERIAL

Metal

ETIM CLASS

EC000024

REMARKS

The cover has anchor points that protect the connections during use against pressures and stresses due to the passage of personnel.

TECHNICAL INFORMATION

NUMBER OF CONNECTORS

1

INDICATOR FUNCTION

No

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

DUST SHUTTER

No

CURRENT (A)

16 A

FORMAT

Italian

IP RATING

IP66

RECESS DIMENSION (MM)

145 x 145 mm en suelo técnico

IK CLASSIFICATION

07

VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

12

REMOVAL OF COMPONENTS

Only with tool

NUMBER OF COVER OPENING POSITIONS

1

REMOVAL OF COVER

Only with tool

EXTINGUISHING (°C)

+650 °C (according to standard IEC 60670)

REMOVAL OF THE FRAME

Only with tool

CAN BE INSTALLED IN TRAY

Plastic

REMOVAL OF THE SOCKET

Only with tool

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053333860

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.446

PRODUCT NET WEIGHT

0.372

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053333860

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

82

PACKAGING WIDTH

147

PACKAGING LENGTH

155

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

1445213

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.446

PACKAGING NET WEIGHT

0.372

PACKAGING WEIGHT UNIT

KGM