


Rotary light regulator-switch from 40 to 300 W/VA Simon 75

REF. 75311-39

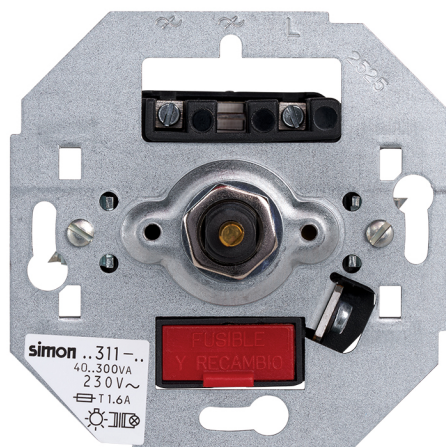

BASIC INFORMATION

DESCRIPTION

Light regulator-switch with rotary operation from 40 to 300 W/VA of the Simon 75 series. For its proper functioning, it requires a power supply of 250 V~. Categorizado in the "regulator - switch" section due to its rotary control for light intensity. The type of installation is carried out through terminal connection by screw. For its correct operation, it is not possible to connect two different electronic voltage regulators to the same circuit. The Simon 75 series is characterized by its easy installation, as demonstrated by this element, suitable for surface and flush mounting with astonishing ease during installation. It also requires a minimum power of 40 W and supports a maximum of 300 W. Its manufacturing has been carried out with metallic components with thermoplastic insulation and halogen-free, thus the element complies with current regulations.

MATERIAL

Plastic, Metal

COMPATIBLE WITH MECHANICAL 2-WAY/CROSSOVER SWITCH

No

COMPATIBLE WITH MECHANICAL SWITCH

No

COMPATIBILITY

Marcos Simon 27 Play, Simon 27 Scudo, Simon 27, Simon 31, Simon 44 Aqua, Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept, and Simon 85.

COMPATIBLE WITH 230V INCANDESCENT AND HALOGEN LAMPS (W)

40 -300 W

PACKAGING CONTENTS

Dimmer and instruction sheet

ETIM CLASS

EC000025

COMPATIBLE WITH MECHANICAL PUSH BUTTON

No

REMARKS

In the same circuit, two electronic voltage regulators cannot be connected.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

ACOUSTIC FUNCTION

No

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

NUMBER OF CONTACTS

3

NUMBER OF CONTROLLABLE CIRCUITS

1

COMPATIBLE WITH HALOGENS WITH ELECTROMAGNETIC TRANSFORMER (W)

200 W

COMPATIBLE WITH ELECTRONIC AUXILIARY

No

NUMBER OF POSSIBLE ELEMENTS

1 element

COMPATIBLE WITH FLUORESCENT LAMPS WITH 1-10V DIMMABLE ELECTRONIC BALLAST

No

COMPATIBLE WITH FLUORESCENT LAMPS (VA)

No

FREQUENCY

50 Hz

INDICATOR FUNCTION

No

IP RATING

IP20

LINKABLE

No

COMPATIBLE WITH LOW CONSUMPTION (W)

No

MAXIMUM POWER (W)

300

MAXIMUM QUANTITY PER CIRCUIT

1

TYPE OF MECHANISM

Rotary

MINIMUM POWER (W)

40

MONOBLOCK

Yes

COMPATIBLE WITH MOTORS (VA)

No

NOMINAL VOLTAGE (V~)

230 V~

OPERATING TEMPERATURE RANGE (°C)

0 - 40 °C

POWER SUPPLY (V~)

230 V~

RECESS DIMENSION (MM)

40

VERSION

Single

VOLTAGE (V~)

230 V~

NUMBER OF WIRES

2

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

5

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION TYPE

Suitable for surface and flush
mounting

CLAW

Included

INSTALLATION DIRECTION

Horizontal, Vertical

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

REMOVAL OF COVER

Only with tool

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2014/30/UE EMC | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-2-1:2004 | EN 60669-2-1:2004 A1:2009 | EN 60669-2-1:2004 A12:2010 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053038536

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053038536

PACKAGING VOLUME

329232

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

57

PACKAGING GROSS WEIGHT

0.13

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

76

PACKAGING NET WEIGHT

0.13

UNITARY PACKAGING GROSS
WEIGHT

0.13

PACKAGING LENGTH

76

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.13

