

## Simon iO master blinds switch champagne Simon 270

REF. 21000133-094



### BASIC INFORMATION

#### FINISH

Matt champagne

#### SYMBOL

Arrow

#### MATERIAL

Thermoplastic

#### COMPATIBILITY

Simon 270 frames

#### PACKAGING CONTENTS

iO Master Blinds and instruction sheet

#### ETIM CLASS

EC000044

## TECHNICAL INFORMATION

|                                                   |                                                                                                                     |                                               |
|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|
| AVAILABLE MARKET<br>CE                            | IP RATING<br>IP20                                                                                                   | POWER SUPPLY (V~)<br>127/230 V~               |
| CABLE SECTION ADMITTED (MM)<br>From 1,5 to 2,5 mm | MAINTENANCE<br>Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine. | RAL<br>7048                                   |
| NUMBER OF POSSIBLE ELEMENTS<br>1 element          | TYPE OF MECHANISM<br>Pivoting                                                                                       | STORAGE TEMPERATURE RANGE (°C)<br>-20 - 85 °C |
| FREQUENCY<br>50 - 60 Hz                           | OPERATING TEMPERATURE RANGE (°C)<br>0 - 40 °C                                                                       | VOLTAGE (V~)<br>127/230 V~                    |
| INDICATOR FUNCTION<br>Yes                         |                                                                                                                     |                                               |

## INSTALLATION AND MAINTENANCE

|                                     |                                                      |                                                   |
|-------------------------------------|------------------------------------------------------|---------------------------------------------------|
| CABLE STRIPPING NECESSARY (MM)<br>7 | INSTALLABLE IN FLUSH MOUNT JUNCTION BOX<br>Universal | INSTALLATION TYPE<br>Suitable for flush mounting  |
|                                     | INSTALLATION DIRECTION<br>Horizontal, Vertical       | TYPE OF TERMINAL CONNECTION - FUNCTION 1<br>Screw |

## REGULATIONS

### REGULATIONS

Dir. 2011/65/UE RoHS + post. mod. | Dir. 2014/53/UE RED | EN 50428:2005 | EN 50428:2005 A1:2007 | EN 50428:2005 A2:2009 | EN IEC 63000:2018 | ETSI EN 300328 V2.2.2

## LOGISTICS INFORMATION

### UNITARY EAN CODE

8421053281642

### UNITARY PACKAGING HEIGHT

0

### UNITARY PACKAGING WIDTH

0

### UNITARY PACKAGING LENGTH

0

### UNITARY PACKAGING VOLUME

0

### UNITARY PACKAGING GROSS WEIGHT

0.051

### PRODUCT NET WEIGHT

0.051

### UNITARY PACKAGING WEIGHT UNIT

KGM

### PACKAGING EAN

8421053281642

### UNITS CONTAINED PACKAGING

1

### PACKAGING HEIGHT

80

### PACKAGING WIDTH

55

### PACKAGING LENGTH

55

### PACKAGING MEASUREMENT UNIT

MMT

### PACKAGING VOLUME

242000

### PACKAGING VOLUME UNIT

MMQ

### PACKAGING GROSS WEIGHT


0.075

### PACKAGING NET WEIGHT

0.051

### PACKAGING WEIGHT UNIT

KGM

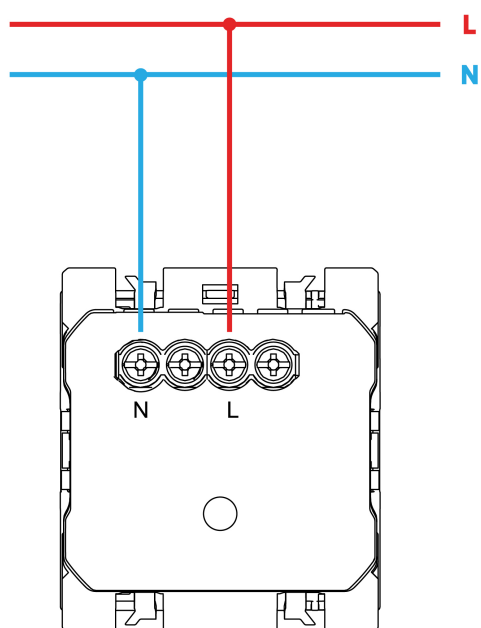

Para información más detallada consultar la hoja de instrucciones  
For more detailed information check the instruction sheet