# Downlight 703.21 Round Comfort NW Spot White

REF. **70321030-284**



## BASIC INFORMATION

| APPLICATION | PACKAGING CONTENTS | ETIM CLASS |
| --- | --- | --- |
| Hotel,Restaurants,Residential,Retail,Office,Healthcare,Education | 1 Unit | EC001744 |

# TECHNICAL INFORMATION

**FREQUENCY**
50 - 60 Hz

**IP RATING**
IP44

**OPERATING TEMPERATURE RANGE (ºC)**
15 - 35 ºC

**POWER SUPPLY (V~)**
230 V~

**COLOR TEMPERATURE (K)**
4000 K

**CONTROL**
On/Off

**CRI**
80

**CUT OFF**
No

**DRIVER INCLUDED**
Yes

**L70 (ºC)**
30,000 h at 25 °C

**LIGHT BEAM APERTURE ANGLE (°)**
20º

**COLOR TYPE**
NW

**LIGHTING EFFICIENCY (LM/W)**
91 lm/W

**LUMENS (LM)**
680 lm

**LUMENS/W**
680 lm/7.5 W

**OPTICS**
Spot

**PHOTOBIOLOGICAL CLASSIFICATION**
Exempt category


**POWER (W)**
7.5 W

**SERVICE LIFE**
30.000 h


**CHROMATICS CRI ICONS**



## PHOTOMETRY ASSETS – CONICAL

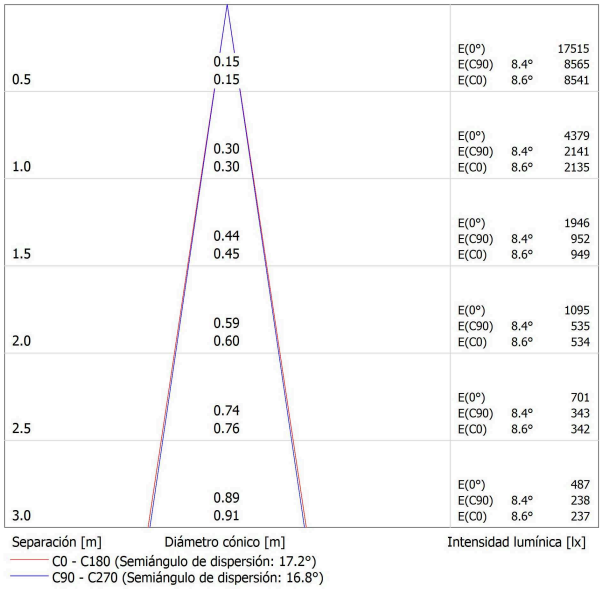


## PHOTOMETRY ASSETS – POLAR

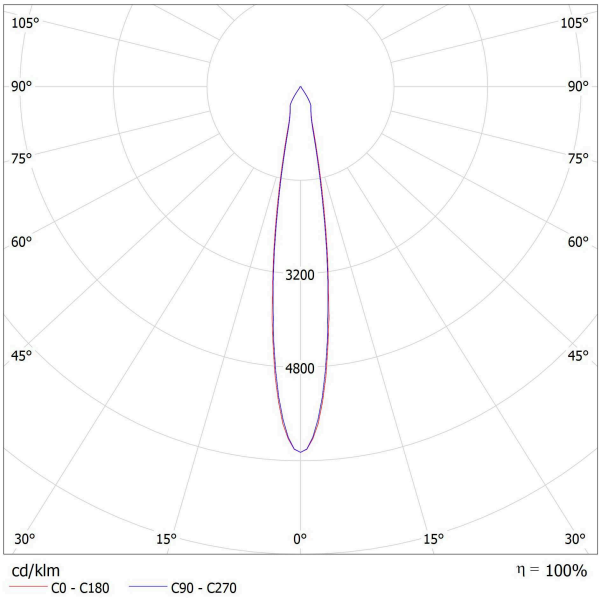


# INSTALLATION AND MAINTENANCE

### INSTALLATION TYPE

Flush-mount

# REGULATIONS

### WARRANTY

3 years

## LOGISTICS INFORMATION

UNITARY EAN CODE
8421053088333

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.345

PRODUCT NET WEIGHT
0.225

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053088333

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
110

PACKAGING WIDTH
135

PACKAGING LENGTH
170

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
2524500

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.345

PACKAGING NET WEIGHT
0.225

PACKAGING WEIGHT UNIT
KGM