


## Buzzer 250 V~ Simon 75

REF. 75806-39

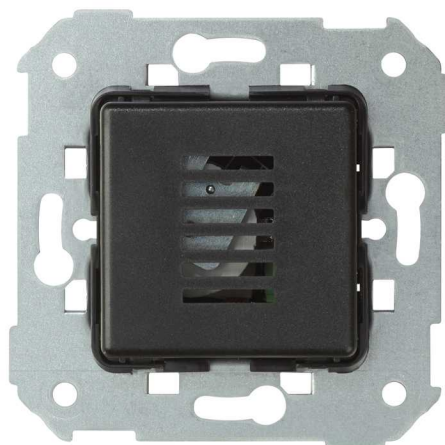

### BASIC INFORMATION

#### DESCRIPTION

Buzzer 250 V~ Simon 75, a sound signal mechanism designed to provide a clear and reliable sound response in residential and professional installations. Its integration into the Simon 75 series ensures aesthetic and functional consistency in any space. With a screw terminal connection system for a secure and stable connection, this electric bell is ready for precise installation in a universal flush-mounted or surface box, maintaining a clean and aligned installation. Made with metallic components and halogen-free thermoplastic insulation, it combines safety, durability, and visual balance in every detail.

#### MATERIAL

Plastic, Metal

#### COMPATIBLE WITH MECHANICAL PUSH BUTTON

Yes

#### ETIM CLASS

EC002484

#### COMPATIBILITY

Marcos Simon 75, Simon 82  
Detail, Simon 82 Nature, Simon  
82 Concept and Simon 82

#### PACKAGING CONTENTS

Buzzer 230V~

#### REMARKS

For a correct installation, a flush-mounted universal box needs to be used. If it is not available, use a surface socket.

## TECHNICAL INFORMATION

|                                                   |                                               |                                               |
|---------------------------------------------------|-----------------------------------------------|-----------------------------------------------|
| AVAILABLE MARKET<br>CE                            | IP RATING<br>IP20                             | RECESS DIMENSION (MM)<br>40                   |
| ACOUSTIC FUNCTION<br>Yes                          | LINKABLE<br>No                                | STORAGE TEMPERATURE RANGE (°C)<br>-20 - 75 °C |
| CABLE SECTION ADMITTED (MM)<br>From 1,5 to 2,5 mm | MONOBLOCK<br>No                               | VERSION<br>Single                             |
| NUMBER OF POSSIBLE ELEMENTS<br>1 element          | NOMINAL VOLTAGE (V~)<br>230 V~                | VOLTAGE (V~)<br>230 V~                        |
| INDICATOR FUNCTION<br>No                          | OPERATING TEMPERATURE RANGE (°C)<br>0 - 40 °C | NUMBER OF WIRES<br>2                          |

## INSTALLATION AND MAINTENANCE

|                                      |                                                      |                                                              |
|--------------------------------------|------------------------------------------------------|--------------------------------------------------------------|
| CABLE STRIPPING NECESSARY (MM)<br>12 | INSTALLABLE IN FLUSH MOUNT JUNCTION BOX<br>Universal | INSTALLATION TYPE<br>Suitable for surface and flush mounting |
| CLAW<br>Included                     | INSTALLATION DIRECTION<br>Horizontal, Vertical       | TYPE OF TERMINAL CONNECTION - FUNCTION 1<br>Screw            |
| REMOVAL OF COVER<br>Only with tool   |                                                      |                                                              |

## REGULATIONS

### REGULATIONS

Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 62080:2009

## LOGISTICS INFORMATION

### UNITARY EAN CODE

8421053256404

### UNITARY PACKAGING HEIGHT

0

### UNITARY PACKAGING WIDTH

0

### UNITARY PACKAGING LENGTH

0

### UNITARY PACKAGING MEASUREMENT UNIT

MMT

### UNITARY PACKAGING VOLUME

3017190

### UNITARY PACKAGING VOLUME UNIT

MMQ

### UNITARY PACKAGING GROSS WEIGHT

0.08

### PRODUCT NET WEIGHT

0.08

### UNITARY PACKAGING WEIGHT UNIT

KGM

### PACKAGING EAN

8421053005149

### UNITS CONTAINED PACKAGING

10

### PACKAGING HEIGHT

82

### PACKAGING WIDTH

165

### PACKAGING LENGTH

223

### PACKAGING MEASUREMENT UNIT

MMT

### PACKAGING VOLUME

3017190

### PACKAGING VOLUME UNIT

MMQ

### PACKAGING GROSS WEIGHT

0.8

### PACKAGING NET WEIGHT

0.8

### PACKAGING WEIGHT UNIT

KGM

